

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
20 March 2003 (20.03.2003)

PCT

(10) International Publication Number
WO 03/022933 A2

(51) International Patent Classification⁷: **C09C 1/42**,
1/00, D21H 19/40, C08K 3/34

(21) International Application Number: **PCT/US02/28305**

(22) International Filing Date:
6 September 2002 (06.09.2002)

(25) Filing Language: **English**

(26) Publication Language: **English**

(30) Priority Data:
60/318,207 7 September 2001 (07.09.2001) **US**

(71) Applicant: **IMERYS PIGMENTS, INC.** [US/US]; 100
Mansell Court, Suite 300, Roswell, GA 30076 (US).

(72) Inventor: **JONES, Philip, J., E.**; 1045 Creek Ridge
Pointe, Alpharetta, GA 30005 (US).

(74) Agent: **GARRETT, Arthur, S.**; Finnegan, Henderson,
Farabow, Garrett & Dunner, L.L.P., 1300 I Street, N.W.,
Washington, DC 20005-3315 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG,
SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC,
VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK,
TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

Published:

— *without international search report and to be republished
upon receipt of that report*

*For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.*

(54) Title: **HYPERPLATY CLAYS AND THEIR USE IN PAPER COATING AND FILLING, METHODS FOR MAKING SAME,
AND PAPER PRODUCTS HAVING IMPROVED BRIGHTNESS**

(57) Abstract: The present invention relates to a hydrous kaolin product having improved optical properties, for example, when used in the production of paper products. The present invention comprises an improved barrier coating for paper and a method of making the coated paper. The present invention also comprises an improved method from making filled and coated paper products. The present invention uses a composition comprising kaolin having a shape factor of at least about 70:1, such as at least about 80:1 or at least about 100:1.

WO 03/022933 A2

HYPERPLATY CLAYS AND THEIR USE IN PAPER COATING AND
FILLING, METHODS FOR MAKING SAME, AND PAPER PRODUCTS
HAVING IMPROVED BRIGHTNESS

Related Application

[001] This nonprovisional application claims the benefit of priority under 35 U.S.C. § 119(e) to U.S. Provisional Application No. 60/318,207, filed September 7, 2001, entitled "THE USE OF HYPERPLATY CLAYS IN PAPER COATINGS AND FILLING, AND PAPER PRODUCTS HAVING IMPROVED BRIGHTNESS," the disclosure of which is incorporated by reference herein in its entirety.

Field of the Invention

[002] The present invention relates to a hydrous kaolin, which provides improved optical properties when used as a filler or coating. Also, the present invention relates to a paper coating and a coated paper product that exhibits improved properties, such as improved brightness. Further, the present invention relates to methods for preparing hydrous kaolin products.

Background of the Invention

[003] Particulate kaolin products find a variety of uses, including as pigments, fillers, and extenders for use in paint, plastics, polymers, papermaking and paper coating. Kaolin clay, also referred to as China Clay, or hydrous kaolin, is comprised predominantly of the mineral kaolinite, a hydrous aluminum silicate, together with small amounts of a variety of impurities.

[004] Particulate kaolins generally exist in three forms: hydrous kaolin, calcined kaolin and chemically aggregated kaolin. Hydrous kaolin is primarily the mineral kaolinite, which has been mined and beneficiated from natural sources. Calcined kaolins are obtained by processing hydrous kaolin at high temperatures, e.g., greater than 500°C. Chemically aggregated kaolins are particle aggregates having a microstructure resembling that of calcined kaolins produced by treating hydrous kaolin with chemicals.

Calcined and chemically aggregated kaolins can show benefits in certain application compositions when compared with hydrous kaolins. However, the benefits associated with calcined and chemically aggregated kaolins are not without disadvantages. The manufacturing costs of calcined and chemically aggregated kaolins are significantly higher than those of hydrous kaolins. The calcined and chemically aggregated kaolins also have the effect of improving certain paper properties while adversely affecting other properties, e.g., strength.

[005] Kaolin has been used as an extender or pigment in paints, plastics and paper coating compositions. Kaolin pigments confer desirable physical and optical properties to such compositions. As flattening (or matting) agents, they help smooth the surfaces of the substrates to which they are applied. As opacifiers, they impart brightness, whiteness, gloss and other desirable optical properties. As extenders, they allow partial replacement of titanium dioxide and other more expensive pigments with minimal loss of whiteness or brightness.

[006] Paper coatings are applied to sheet materials for a number of purposes including, but not limited to, increasing the gloss, smoothness, opacity and/or brightness of the material. Coatings may also be applied to hide surface irregularities or in other ways improve the surface for the acceptance of print. Paper coatings are generally prepared by forming a fluid aqueous suspension of pigment material together with a hydrophilic adhesive and other optional ingredients.

[007] Coatings have been conventionally applied by means of a coating machine including a short dwell time coating head, which is a device in which a captive pond of coating composition under a slightly elevated pressure is held in contact with a moving paper web for a time sufficient to coat the paper before excess coating composition is removed by means of a trailing blade.

[008] Additional advantages of the invention will be set forth in part in the description which follows, and in part will be obvious from the description, or may be learned by practice of the invention. The objects and advantages of the invention will be realized and attained by means of the elements and combinations particularly pointed out in the appended claims.

[009] It is to be understood that both the foregoing general description and the following detailed description are exemplary and explanatory only and are not restrictive of the invention, as claimed.

[010] The accompanying drawings, which are incorporated in and constitute a part of this specification, illustrate several embodiments of the invention and together with the description, serve to explain the principles of the invention.

Brief Description of the Drawings

[011] Figure 1 is a flowchart illustrating a process for refining a coarse fraction kaolin according to Example 1;

[012] Figure 2 is a flowchart illustrating a process for refining a coarse fraction kaolin according to Example 2;

[013] Figure 3 is a flowchart illustrating a process for refining a coarse fraction kaolin according to Example 3;

[014] Figure 4 is a flowchart illustrating the process for making a barrier coating pigment from a coarse fraction kaolin;

[015] Figure 5 is a graph illustrating brightness (y-axis) as a function of the TiO_2 content (x-axis) for two paper coatings according to the present invention;

[016] Figure 6 is a graph illustrating sheen (y-axis) versus opacity (x-axis) of various ground U.S. clays;

[017] Figure 7 illustrates a plot of the d50 (y-axis) versus shape factor (x-axis) for Invention Kaolin 3 and Invention Kaolin 4 compared to two prior art kaolins;

[018] Figure 8 is a flowchart illustrating a process for refining a coarse fraction kaolin according to Example 10.

Summary of the Invention

[019] Generally, kaolins used in coatings and fillers are selected to have a narrow particle size distribution and high crystallinity which have been believed to provide the favored set of physical and optical properties, for example, maximum light scatter. Generally, coarse kaolin clays have been recognized as exhibiting poor light scatter. The present invention differs from the prior art in providing a coating or filling composition including a kaolin that may be rather coarse, but which nonetheless exhibits high light scatter. As a filler in, for example, unbleached kraft paper, the kaolins according to the present invention showed a light scatter similar to calcined clays without the detrimental effects on strength associated with calcined clays. The compositions according to the present invention further improve over prior compositions by making it possible to maintain sheet brightness while further reducing the amount of expensive TiO_2 present in the paper coating composition.

[020] There is disclosed a paper coating composition comprising at least one kaolin having a shape factor of at least about 70:1, a TiO_2 , a binder, and optionally a dispersant, and wherein the paper coating composition has a ratio of the kaolin to TiO_2 of less than about 85:15 parts by weight.

[021] There is further disclosed a method of making a coated paper comprising coating a fibrous substrate with a paper coating composition comprising a binder and at least one kaolin having a shape factor of at least about 70:1.

[022] There is still further disclosed a method of making a filled paper comprising adding to said paper -kaolin having a shape factor of at least about 70:1

[023] There is also disclosed a coated paper comprising a fibrous substrate and a paper coating composition comprising kaolin having a shape factor of at least about 70:1.

[024] Finally, there is disclosed a method of improving barrier properties in paper comprising coating a fibrous substrate with a coating composition comprising kaolin having a shape factor of at least about 70:1.

[025] One aspect of the present invention provides a composition comprising kaolin having a shape factor of at least about 70:1. In other embodiments, the kaolin can have a shape factor of at least about 80:1, at least about 90:1, or at least about 100:1.

[026] Another aspect of the present invention provides a coating composition, comprising kaolin having a shape factor of at least about 70:1, a binder; and optionally a dispersant.

[027] Another aspect of the present invention provides a filler comprising kaolin having a shape factor of at least about 70:1.

[028] Another aspect of the present invention provides a method of making a coated paper comprising coating a fibrous substrate with a paper coating composition comprising a carrier and kaolin having a shape factor of at least about 70:1.

[029] Another aspect of the present invention provides a method of making a filled paper comprising providing a fibrous substrate, and adding to the substrate kaolin having a shape factor of at least about 70:1.

[030] Another aspect of the present invention provides a coated paper comprising a fibrous substrate and a coating on the substrate comprising kaolin having a shape factor of at least about 70:1.

[031] Another aspect of the present invention provides a method of improving barrier properties in paper comprising coating a fibrous substrate with a coating composition comprising kaolin having a shape factor of at least about 70:1.

[032] Another aspect of the present invention provides a method of refining kaolin, comprising providing a kaolin slurry, attrition grinding the kaolin slurry, removing the coarse particle size fraction from the slurry by centrifugation, and attrition grinding the coarse-particle size fraction to provide a kaolin product having a shape factor of at least about 70:1.

[033] Another aspect of the present invention provides an extender for paint comprising kaolin, prepared by a method comprising providing a kaolin slurry comprising whole crude kaolin or a blend of whole crude and coarse-particle size fractions from a centrifuge, attrition grinding the kaolin slurry, removing the coarse particle size fraction from the slurry by centrifugation, and attrition grinding the coarse-particle size fraction to provide a kaolin product having a shape factor of at least about 70:1.

[034] Another aspect of the present invention provides a slurry comprising kaolin having a shape factor of greater than 70:1 and a stabilizing agent.

Detailed Description

[035] One aspect of the present invention provides a composition that is used in the production of coated or filled substrates. Another aspect of the present invention provides the coated or filled products made according to the present invention. The compositions and products according to the present invention utilize kaolin having a high shape factor to prepare a coated or filled paper exhibiting improved brightness. "Shape factor" as used herein is a measure of an average value (on a weight average basis) of the ratio of mean particle diameter to particle thickness for a population of particles of varying size and shape as measured using the electrical conductivity method and apparatus described in U.S. Patent No. 5,128,606, which is incorporated herein by reference in its entirety. In the measurement method described in U.S. Patent No. 5,128, 606, the electrical conductivity of a fully dispersed aqueous suspension of the particles under test is caused to flow through an elongate tube. Measurements of the electrical conductivity are taken between

(a) a pair of electrodes separated from one another along the longitudinal axis of the tube, and (b) a pair of electrodes separated from one another across the transverse width of the tube, and using the difference between the two conductivity measurements the shape factor of the particulate material under test is determined. "Hyperplaty" refers to hydrous kaolin clays with shape factors of greater than about 40:1. In one embodiment according to the present invention, the kaolin clays have shape factors of greater than about 70:1, for example greater than about 80:1, or greater than about 90:1. According to another aspect of the invention, the shape factor is greater than about 100:1, for example 110:1 and above. In another embodiment, the kaolin clay has a shape factor of at and above about 120:1 and at and above about 140:1. The clays according to these embodiments of the invention have been found to show surprisingly high light scatter in paper coatings and fillings.

[036] The high shape factor may be achieved by grinding mined kaolinitic clays until the desired shape factor is achieved. Any art recognized grinding method can be used with the present invention including but not limited to, for example, wet grinding using sand or ceramic media. According to one embodiment of the present invention, the kaolin may be prepared by light comminution, e.g., grinding or milling, of a coarse kaolin to give suitable delamination thereof. The comminution may be carried out by use of beads or granules of a ceramic or plastic, e.g., nylon, grinding or milling aid. Appropriate grinding energies will be readily apparent and easily calculated by the skilled artisan. Significant grinding energies may be necessary to attain desirable high shape factors, however kaolin crude selected for its natural platyness will grind to high shape factors in an energy range typically used to manufacture standard delaminated kaolin pigments that have lesser shape factors.

[037] Crude kaolin or a high shape factor product obtained from grinding or milling may be refined to remove impurities and improve physical

properties using well known procedures generally referred to as beneficiation processes. The kaolin may be treated by a known particle size classification procedure, screening and/or centrifuging, to obtain particles having a desired particle size distribution and d_{50} value (as discussed below). According to one embodiment according to the present invention, mined clays are suitably first degrittied before they are subjected to grinding to achieve the desired shape factor.

[038] "Mean particle diameter" is defined as the diameter of a circle that has the same area as the largest face of the particle. The mean particle size, d_{50} value, and other particle size properties referred to in the present application are measured in a well known manner by sedimentation of the particulate material in a fully dispersed condition in an aqueous medium using a SEDIGRAPH 5100 machine as supplied by Micromeritics Corporation. Such a machine provides measurements and a plot of the cumulative percentage by weight of particles having a size, referred to in the art as the "equivalent spherical diameter" (esd), less than the given esd values. The mean particle size d_{50} is the value determined in this way of the particle esd at which there are 50% by weight of the particles, which have an esd less than that d_{50} value.

[039] The value of d_{50} for the particulate kaolin according to the present invention may be, for example, in the range of about 0.2 μm to about 10 μm .

[040] Previously, it was believed that coarse kaolin particles yielded pigment products having poor light scatter. The present invention's use of hyperplaty clay allows significantly coarser products to be used with comparable or better light scatter. According to one embodiment of the present invention, the particle size distribution of the kaolin may be such that about 20% or more of the particles have an esd of 2 microns or less. A suitable product according to the invention may have a particle size

distribution where about 50% to about 85% of the particles have an esd of 2 microns or less.

[041] The steepness of the particle size distribution (psd) of the particulate kaolin according to the present invention, often referred to as narrowness of the psd, refers to the slope of the psd curve. Thus, in some cases the psd of the kaolin according to the present invention may be steep and in other cases it may be broad. The steepness or broadness of the psd is one indicator of anticipated product performance and can be selected by the skilled artisan based upon desired end properties. Steepness, as used in herein, is measured as 100 times the ratio of d_{30} to d_{70} , where d_{30} is the value of the particle esd less than which there are 30% of the particles and d_{70} is the value of the particle esd less than which there are 70% of the particles as obtained from the psd measure above.

[042] Another aspect of the present invention provides a kaolin product having a shape factor value of at least about 70 formed by attrition grinding a coarse particle size kaolin fraction. Kaolin consists predominantly of kaolinite crystals, which are shaped as thin hexagonal plates or in booklets of platelets called "stacks." Kaolinite stacks may be subjected to a grinding action to easily separate or delaminate the stacks or books comprised of more than one platelet into smaller books or individual platelets. The act of delamination parts or cleaves natural kaolinite crystals along the (001) crystallographic plane that is perpendicular to its "c-axis." Many standard kaolin products are made by attrition grinding a dispersed slurry of blunged-degitted-brightness beneficiated blend of whole crude and coarse-particle size fraction from a centrifuge. These standard delaminated products, however, may not show sufficient delamination, as they can contain booklets that comprise several to scores of kaolinite platelets.

[043] Accordingly, this aspect of the present invention provides a method for obtaining a kaolin having a shape factor of about 70:1 or higher. The method comprises: (a) providing a kaolin slurry, where in one

embodiment, the slurry comprises a whole crude kaolin or a blend of whole crude and coarse particle kaolin from a centrifuge; (b) attrition grinding the kaolin slurry; (c) removing a coarse particle size fraction from the slurry by centrifugation; and (d) attrition grinding the coarse-particle size fraction. Optionally, a centrifugation step may be inserted prior to (b) to remove ultrafine particles in order to enhance the efficiency of attrition grinding.

[044] In one embodiment, the kaolin product is produced by attrition grinding a crude clay slurry. The crude can comprise, in one embodiment, either a whole crude or a blend of whole crude and coarse-particle size fractions from a centrifuge. The clay slurry may be a dispersed-degritt-brightness beneficiated clay slurry.

[045] In one embodiment, the kaolin slurry can be obtained from crude kaolin ore, which is generally a viscous, sedimentary kaolin containing micas, mixed-layered clay minerals, smectites, and vermiculites or hydrous micas. An exemplary kaolin clay crude further comprises potassium oxide in an amount ranging from 0.10 % to 3.0% by weight, and magnesium oxide in an amount ranging from 0.03% to 0.5% by weight. Such crude can have a shape factor equal to or greater than 15, or equal to or greater than 25. The crude kaolin can have a particle size distribution of 75% by weight less than 2 μm .

[046] To form the kaolin slurry, water can be added to a dry kaolin crude to form an aqueous suspension, such as a suspension containing from 30% to 70% kaolin on a dry weight basis. Chemicals can be added to disperse the clay particles. The kaolin slurry can then be degritt to remove sand-sized particles prior to further processing or transport by pipeline to a plant.

[047] Where the crude kaolin slurry comprises a blend of whole crude and coarse-particle size fractions from a centrifuge, the coarse particle size fraction may have a shape factor of greater than 20, such as a shape

factor greater than 25. In another embodiment, the coarse particle size fraction may have a shape factor of greater than 35.

[048] The attrition grinding steps can be performed with a particulate grinding medium for a time sufficient to dissipate in the slurry or suspension enough energy to impart the kaolin particles with a shape factor value ranging from about 35 to about 60 or greater. In another embodiment, the attrition grinding the crude kaolin slurry results in kaolin having a shape factor value of at least about 60.

[049] The amount of energy dissipated in the suspension of kaolin clay can range from about 20 kWh to about 100 kWh, such as from about 25 to about 75 kWh of energy per ton of kaolin present on a dry weight basis. The attrition grinding mill is equipped with a stirrer, which is capable of being rotated at a speed such that a vortex is formed in the suspension in the mill during grinding.

[050] The particulate grinding medium can have a specific gravity of 2 or more. In one embodiment, the grinding medium comprises grains of quartz sand, or similar media. The grains can have a diameter of less than 2 mm. In another embodiment, the grains have a diameter of greater than 0.25 mm and less than 2 mm. In yet another embodiment, the grinding medium comprises fine (20-40#) Carbolite media.

[051] Prior to attrition grinding the crude kaolin slurry, the slurry can be subjected to beneficiation and/or degritting processes. In one embodiment, the crude kaolin slurry comprises a dispersed-degritt-brightness beneficiated clay slurry. Degritting is the process of passing a kaolin clay slurry through drag boxes and a screen to remove coarse (grit) particles of a given size. For example, the screen can be a + 325 mesh (U.S. Standard) screen suitable for removing particles larger than 45 μm .

[052] After attrition grinding the crude slurry, the slurry can be passed through a centrifuge, such as a solid-bowl decanter centrifuge, for a classification step, where the clay is classified to a particle size distribution

such that 80% to 95% by weight of the particles have an esd less than 2 μm . In one embodiment, 85% to 92% by weight of the particles have an esd less than 2 μm . In yet another embodiment, 20% to 40% of the particles have an esd less than 0.25 μm . In still another embodiment, 25% to 35% of the particles have an esd less than 0.25 μm . In still another embodiment, the weight of the particles in the finer fraction ranges from 5% to 30% of the feed to centrifuge.

[053] After removing the coarse-particle size fraction of the attrition-ground product, i.e. the "b-fraction" via a centrifuge, the coarse-fraction can be diluted with water to form a slurry that may be subjected to an additional attrition grinding step to produce the final kaolin product having a shape factor value of at least 70. This product may alternatively subject to further beneficiation to obtain desired brightness or rheology through conventional processing techniques such as flotation, selective flocculation, and bleaching. Previously, in some instances, coarse fractions were discarded, as this kaolin fraction was sometimes regarded as being too coarse for coating applications. Thus, one advantage of this embodiment arises from the use of coarse fraction, which was in some cases a previously undesired manufacturing by-product, to produce a useful, kaolin product.

[054] In one embodiment, the coarse particle size fraction comprises kaolin having a shape factor of at least about 20, such as at least about 25 or at least about 30, and in some cases as high as about 50 to about 60.

[055] The final kaolin particles can have a mean particle size (d_{50} by Sedigraph) ranging from about 0.1 μm to about 2.0 μm , such as a d_{50} ranging from about 0.25 μm to about 1 μm .

[056] In another embodiment the coarse particle fraction kaolin slurry is subjected to a beneficiation step and/or a degritting step, prior to the attrition grinding process. In another embodiment, the coarse particle fraction kaolin slurry is subjected to both beneficiation and degritting processes.

[057] In one embodiment, the invention can advantageously reduce the population of kaolin crystals that exist as stacks. The kaolin product of the invention can have superior coverage relative to standard kaolin in lightweight and ultra lightweight coated paper applications, as the higher population of individual plate crystals present in hyperplaty kaolin provides a relatively thin and uniform plate thickness. In one embodiment, the invention provides a paper coated with hyperplaty kaolin, as described herein.

[058] Another aspect of the present invention provides an extender for paints, the extender comprising a coarse particle size kaolin having a d_{50} ranging from about 0.25 μm to about 2.0 μm . In one embodiment, the kaolin extender has a shape factor of greater than about 90. The extender can be prepared by attrition grinding a coarse particle size kaolin fraction, as described above.

[059] In certain applications, it may be desired to use extenders with a balance of low sheen and high opacity. Accordingly, in one embodiment, the extender is coarse, with a d_{50} ranging from 0.25 μm to 2.0 μm , such as a d_{50} ranging from 0.5 μm to 1.5 μm . For example, the d_{50} can be approximately 1.3 μm . In other applications, control of sheen may not be required, and therefore the kaolin can comprise finer particles with a d_{50} ranging from 0.25 μm to 1 μm . For example, the d_{50} can be approximately 0.6 μm .

[060] Another embodiment provides a paint comprising an extender comprising a coarse particle size kaolin having a d_{50} ranging from 0.25 μm to 2.0 μm . In one embodiment, the kaolin extender has a shape factor of at least 70:1, or any other value described herein. In another embodiment, the kaolin extender has a shape factor of at least 100:1.

[061] Another aspect of the present invention provides an extender for paint comprising a kaolin, prepared by a method comprising providing a kaolin slurry comprising whole crude kaolin or a blend of whole crude and coarse-particle size fractions from a centrifuge, attrition grinding the kaolin

slurry, removing the coarse particle size fraction from the slurry by centrifugation, and attrition grinding the coarse-particle size fraction to provide a kaolin product having a shape factor of at least about 70:1, or any of the shape factors described herein.

[062] Another aspect of the present invention relates to the use of the hyperplaty clay for filling, for example, paper or paperboard product, such as a supercalendered magazine paper filler product. In one embodiment, the paper or paperboard product is filled with a kaolin having a shape factor value of at least about 70.

[063] Another aspect of the invention provides a method of making a matte paper coating, comprising: (a) attrition grinding a crude kaolin slurry comprising a blend of coarse-fractions from a centrifuge that have been degrittied to 80% finer than 5 μm ; (b) removing the coarse particle size fraction from the slurry by centrifugation; and (c) attrition grinding the coarse particle size fraction to provide kaolin having a shape factor of at least 70:1.

[064] Another aspect of the invention provides a method for producing a pigment product comprising:

(a) mixing a raw or partially processed kaolin clay with water to form an aqueous suspension;

(b) attrition grinding the suspension produced by step (a) by using a particulate grinding medium by a process in which the average shape factor of the kaolin clay is increased by at least 10, preferably at least 20;

(c) separating the suspension of ground kaolin clay from the particulate grinding medium; and

(d) dewatering the suspension of ground kaolin clay separated in step (c) to recover a kaolin pigment therefrom.

[065] In step (a) of the method according to the second aspect of the present invention, the kaolin clay may form from 20% to 70%, usually from 20% to 45% of the treated suspension. The kaolin clay can comprise a sedimentary kaolin clay, such as a sedimentary kaolin clay from Georgia,

USA. The raw kaolin clay may have a psd such that not more than about 40% by weight comprises particles having an esd larger than $10\mu\text{m}$ and not more than 50% by weight, e.g. from about 20% to about 40% by weight, comprising particles having an esd smaller than $2\mu\text{m}$. The shape factor of the kaolin clay treated in step (a) may be less than 15, such as in the range of from about 5 to about 10. Thus, the shape factor may be increased by a differential of at least 30, in some cases at least 40, e.g. from a shape factor value of less than 15 to a shape factor value greater than 55.

[066] When preparing an aqueous suspension of the kaolin clay to be treated in step (a) a dispersing agent for the kaolin clay may or may not be added to the kaolin clay.

[067] The kaolin clay employed in step (a) may be a coarse component obtained from classifying, e.g. using a centrifuge, a standard blocky sedimentary kaolin clay, such as a kaolin clay having a shape factor of from 5 to 10. The coarse component may have not more than 50% by weight of particles having an esd less than $2\mu\text{m}$ and not more than 10% by weight having an esd less than $0.25\mu\text{m}$.

[068] The psd of the kaolin clay may be adjusted by blending from 99 to 50 parts by weight of the kaolin clay with from 1 to 50 parts by weight, such as from 10 to 30 parts by weight, of a fine platy kaolin component, e.g. having a shape factor of at least 15, such as from 15 to 40 and whose percentages by weight of particles smaller than $2\mu\text{m}$ and $0.25\mu\text{m}$ are respectively at least 85% by weight and at least 20% by weight. The fine platy kaolin component may be a kaolin derived from either a primary or a sedimentary deposit. The fine platy kaolin component may be added to the kaolin or obtained from the coarse component prior to or after the grinding step (b). The addition may be carried out with the kaolins to be blended in either powdered, dry form or in the form of an aqueous suspension.

[069] A resulting kaolin product prepared by blending in the manner described can improve characteristics of the kaolin, such as the rheology and

dewatering characteristics of a resulting aqueous suspension, and can provide better runnability and particle alignment when the kaolin is used in a coating composition.

[070] The kaolin clay may be subjected to one or more well known purification steps to remove undesirable impurities, e.g. between steps (a) and (b) or between steps (c) and (d). For example, the aqueous suspension of kaolin clay may be subjected to a froth flotation treatment operation to remove titanium containing impurities in the froth. Alternatively, or in addition, the suspension may be passed through a high intensity magnetic separator to remove iron containing impurities.

[071] Step (b) may comprise a process wherein the suspension of kaolin clay is treated by medium attrition grinding wherein an energy of from about 40 kWh to about 250 kWh per tonne of clay (on a dry weight basis) is dissipated in the suspension.

[072] The process of step (b) may comprise a process comprising at least two stages, namely a first stage (b1) wherein delamination of the kaolin clay occurs and a second stage (b2) wherein comminution of the platelets of the kaolin clay occurs.

[073] A gentle comminution step (b1) can be performed, such as grinding via a particulate grinding medium in order to break down composite particles, which are present in the raw kaolin clay. Such composite particles generally comprise coherent stacks or blocks of individual hexagonal plate-like particles, especially where the kaolin clay is from a sedimentary deposit. When the kaolin clay is subjected to relatively gentle comminution, e.g. by grinding in step (b1), many of the composite particles can be broken down to give the individual thin, substantially hexagonal plates, i.e., delamination, the result being an increase of the average shape factor of the kaolin clay. For example, this process may increase the shape factor of the kaolin clay from a starting shape factor of about 5 to 10 to an increased shape factor of at least about 50 to 55. By "relatively gentle grinding" we mean grinding in an attrition

grinding mill with a particulate grinding medium, the contents of the attrition grinding mill being agitated by means of an impeller which rotates at a speed which is insufficient to set up a vortex in the suspension, such as at a peripheral speed below about 10 m.s^{-1} and in which the amount of energy dissipated in the suspension during grinding is less than about 75 kWh, such as less than about 55 kWh per ton of kaolin clay on a dry weight basis. The particulate grinding medium can be of relatively high specific gravity, for example 2 or more, and may for example may comprise grains of silica sand, the grains generally having diameters not larger than about 2 mm and not smaller than about 0.25 mm.

[074] The second stage (b2) of the two stage form of step (b) can comprise grinding in an attrition grinding mill which is equipped with a stirrer capable of being rotated at a speed such that a vortex is formed in the suspension in the mill during grinding. The particulate grinding medium can have a specific gravity of 2 or more, and can comprise, for example, grains of silica sand where the grains can have diameters not larger than about 2 mm and not smaller than about 0.25 mm. If stage (b2) is preceded by a relatively gentle comminution in stage (b1), the amount of energy dissipated in the suspension of kaolin clay in stage (b2) can be in the range of from about 40 kWh to about 120 kWh per dry ton of kaolin clay. If the relatively gentle comminution step (b1) is omitted, the amount of energy dissipated in the suspension of kaolin clay in step (b) can be in the range of from about 100 kWh to about 250 kWh per dry ton of kaolin clay.

[075] In step (c), the suspension of ground kaolin clay can be separated from the particulate grinding medium in any manner known in the art, such by passing the suspension through a sieve of appropriate aperture size, for example a sieve having nominal aperture sizes in the range of from about 0.1 mm to about 0.25 mm.

[076] Following step (c) or step (d) the kaolin clay may be further treated to improve one or more of its properties. For example high energy

liquid working, such as by using a high speed mixer, may be applied to the product in slurry form, e.g. before step (d) or after step (d) and subsequent re-dispersion in an aqueous medium, e.g. during makedown of a coating composition.

[077] In step (d), the suspension of ground kaolin may be dewatered in one of the ways well known in the art, e.g. filtration, centrifugation, evaporation and the like. In one embodiment, dewatering can be performed via a filter press. For example, use of a filter press may be made to form a cake having a water content in the range of from about 15% to about 35% by weight. This cake may be mixed with a dispersing agent for the kaolin clay and can be converted into a fluid slurry, which may be transported and sold in this form. Alternatively, the kaolin clay may be thermally dried, for example by introducing the fluid slurry of the kaolin clay into a spray drier and transported in a substantially dry form.

[078] A fine platy kaolin component may be blended with the product of step (d) in the manner described earlier if such a component has not already been added prior to step (d).

[079] In one embodiment, the pigment product may have a specific surface area as measured by the BET, N_2 method of at least $12 \text{ m}^2 \cdot \text{g}^{-1}$, preferably from $15 \text{ m}^2 \cdot \text{g}^{-1}$ to $20 \text{ m}^2 \cdot \text{g}^{-1}$.

[080] In one embodiment, pigment product produced in this aspect of the invention may be used in paper coating. The coating composition can be used for producing gloss coatings on paper and other substrates which composition comprises an aqueous suspension of a particulate pigment together with a hydrophilic adhesive or binder.

[081] The solids content of the paper coating composition may be greater than 60% by weight, such as a solids content of at least 70%, or even as high as possible but still giving a suitably fluid composition which may be used in coating. The composition may include a dispersing agent, e.g. up to 2% by weight of a polyelectrolyte based on the dry weight of pigment present,

or any other dispersing agent known in the art, such as those described herein. The pigment product according to the first aspect of the invention may be used as the sole pigment in a paper coating composition, or it may be used in conjunction with one or more other known pigments, such as for example, (commercially available) kaolin, calcined kaolin, natural or precipitated calcium carbonate, titanium dioxide, calcium sulphate, satin white, talc and so called 'plastic pigment'. In one embodiment, when a mixture of pigments is used, the pigment product according to this aspect of the invention, is present in the mixture in an amount of at least 80% of the total dry weight of the mixed pigments.

[082] The binder of the composition may comprise an adhesive derived from natural starch obtained from a known plant source as described herein, although it is not essential to use starch as a binder ingredient. Other binders, which may be used with or without starch are also described herein.

[083] Where starch is employed as a binder ingredient, the starch may be unmodified or raw starch, or it may be modified by one or more chemical treatments known in the art. The starch may, for example, be oxidized to convert some of its $-\text{CH}_2\text{OH}$ groups to $-\text{COOH}$ groups. In some cases the starch may have a small proportion of acetyl, $-\text{COCH}_3$, groups. Alternatively, the starch may be chemically treated to render it cationic or amphoteric, i.e., with both cationic and anionic charges. The starch may also be converted to a starch ether, or hydroxyalkylated starch by replacing some $-\text{OH}$ groups with, for example, $-\text{OCH}_2\text{CH}_2\text{OH}$ groups, $-\text{OCH}_2\text{CH}_3$ groups or $-\text{OCH}_2\text{CH}_2\text{CH}_2\text{OH}$ groups. A further class of chemically treated starches that may be used is that known as the starch phosphates. Alternatively, the raw starch may be hydrolyzed by means of a dilute acid or an enzyme to produce a gum of the dextrin type.

[084] The starch binder used in the composition according to this aspect of the invention can be present in an amount ranging from 4% to 25% by weight, based on the dry weight of pigment. The starch binder may be

used in conjunction with one or more other binders, for example synthetic binders of the latex or polyvinyl acetate or polyvinyl alcohol type. When the starch binder is used in conjunction with another binder, e.g. a synthetic binder, the amount of the starch binder can be present in an amount ranging from 2% to 20% by weight, and the amount of the synthetic binder can be present in an amount ranging from 2% to 12% by weight, both based on the weight of dry pigment. In one embodiment, at least 50% by weight of the binder mixture comprises modified or unmodified starch.

[085] Another aspect of the present invention provides a method of forming a coated paper, comprising applying the kaolin composition to coat a sheet of paper and calendering the paper to form a gloss coating thereon. In one embodiment, the gloss coating is formed on both sides of the paper.

[086] Another aspect of the present invention provides a method of making a coated paper comprising, coating a fibrous substrate with a paper coating composition comprising a filler comprising kaolin having a shape factor of at least about 70:1, or any of the shape factors described herein.

[087] Another aspect of the present invention provides a coated paper comprising a fibrous substrate and a coating on the substrate comprising kaolin having a shape factor of at least about 70:1, or any of the shape factors described herein.

[088] Another aspect of the present invention provides a method of making a filled paper comprising providing a fibrous substrate and adding to the substrate kaolin having a shape factor of at least about 70:1, or any of the shape factors described herein.

[089] Calendering is a well known process in which paper smoothness and gloss is improved and bulk is reduced by passing a coated paper sheet between calender nips or rollers one or more times. Usually, elastomer coated rolls are employed to give pressing of high solids compositions. An elevated temperature may be applied. Five or more passes through the nips may be applied.

[090] The paper after coating and calendering in the method according to this aspect may have a total weight per unit area ranging from 30 g.m⁻² to 70 g.m⁻², such as from 49 g.m⁻² to 65 g.m⁻², or further from 35 g.m⁻² to 48 g.m⁻². The final coating can have a weight per unit area ranging from 3 g.m⁻² to 20 g.m⁻², such as from 5 g.m⁻² to 13 g.m⁻². Such a coating may be applied to both sides of the paper. The coated paper may be LWC or ULWC paper. The paper gloss may be greater than 45 TAPPI units and the Parker Print Surf value at a pressure of 1MPa of each paper coating may be less than 1µm.

[091] The gloss of a coated paper surface may be measured by means of a test laid down in TAPPI Standard No 480 ts-65. The intensity of light reflected at an angle from the surface of the paper is measured and compared with a standard of known gloss value. The beams of incident and reflected light are both at an angle of 75° to the normal to the paper surface. The results are expressed in TAPPI gloss units. In one embodiment, the gloss of the pigment product may be greater than 50, in some cases greater than 55, TAPPI units.

[092] The Parker Print Surf test provides a measure of the smoothness of a paper surface, and comprises measuring the rate at which air under pressure leaks from a sample of the coated paper which is clamped, under a known standard force, between an upper plate which incorporates an outlet for the compressed air and a lower plate, the upper surface of which is covered with a sheet of either a soft or a hard reference supporting material according to the nature of the paper under test. From the rate of escape of the air, a root mean cube gap in µm between the paper surface and the reference material is calculated. A smaller value of this gap represents a higher degree of smoothness of the surface of the paper under test.

[093] An improvement can be provided where the binder present in the coating composition comprises starch. However, an improvement is also obtained where other known starch-free binders are employed (with or without

starch present). In each case the adhesive or binder may form from 4% to 30%, e.g., 8% to 20%, for example from 8% to 15% by weight of the solids content of the composition. The amount employed will depend upon the composition and the type of adhesive, which may itself incorporate one or more ingredients

[094] The particulate kaolin according to the present invention may be mixed with other pigments, fillers and extenders to obtain a blend of properties provided by the constituents of the mixture. The added pigment, filler or extender material may comprise one or more of hydrous kaolin, calcined kaolin, aggregated kaolin, calcium carbonate (ground or precipitated) talc, gypsum or other known white particulate mineral or pigment material.

[095] Paper coatings and paper fillers according to the present invention include, in addition to the kaolin as described above, materials generally used in the production of paper coatings and paper fillers. Specifically, the compositions will include a binder and a pigment, typically TiO_2 . The fillers and coatings according to the present invention may optionally include other additives, including, but not limited to, dispersants, cross linkers, water retention aids, viscosity modifiers or thickeners, lubricity or calendering aids, antifoamers/defoamers, gloss-ink hold-out additives, dry or wet rub improvement or abrasion resistance additives, dry or wet pick improvement additives, optical brightening agents or fluorescent whitening agents, dyes, biocides, leveling or evening aids, grease or oil resistance additives, water resistance additives and/or insolubilisers.

[096] Any art recognized binder may be used in the present invention. Exemplary binders include, but are not limited to, adhesives derived from natural starch obtained from a known plant source, for example, wheat, maize, potato or tapioca; synthetic binders, including styrene butadiene, acrylic latex, vinyl acetate latex, or styrene acrylic; casein; polyvinyl alcohol; polyvinyl acetate; or mixtures thereof.

[097] Paper coatings have very different binder levels depending upon the type of printing to be used with the coated paper product. Appropriate binder levels based upon the desired end product would be readily apparent to the skilled artisan. Binder levels are controlled to allow the surfaces to receive ink without disruption. The latex binder levels for paper coatings generally range from about 3% to about 30%. In one embodiment according to the present invention, the binder is present in the paper coating in an amount of from about 3% to about 10%. In another embodiment according to the present invention, the binder is present in the coating in an amount ranging from about 10% to about 30% by weight.

[098] Another aspect of the present invention provides a method of making a barrier coating from a coarse fraction kaolin having the properties described herein. Barrier coatings are useful to impart to paper resistance to moisture, moisture vapor, grease, oil, air, etc.

[099] When making barrier coatings, the amount of binder in the formulation may be very high on the order of 40% to 50%. The binder combined with the flattest possible plates result in a coating, which exhibits excellent barrier properties.

[0100] Another aspect of the present invention provides a barrier coating composition, comprising a slurry comprising kaolin having a shape factor of at least about 70:1, or any of the shape factors described herein. The solids content of the slurry can range from about 45% to about 70%.

[0101] Another aspect of the present invention provides a method of improving barrier properties in a paper comprising coating a fibrous substrate with a paper coating composition comprising a kaolin having a shape factor of at least about 70:1, or any of the shape factors described herein.

[0102] Another aspect of the present invention provides a filler comprising a kaolin having a shape factor of at least about 70:1, or any of the shape factors described herein.

[0103] Another aspect of the present invention provides a slurry comprising a kaolin having a shape factor of greater than 70:1 and a stabilizing agent. In one embodiment, the kaolin can have a shape factor of at least about 80:1, or any of the shape factors described herein.

[0104] Many stabilizing agents are known in the art for such slurries. In one embodiment, the stabilizing agent comprises carboxymethylcellulose. In another embodiment, the stabilizing agent can comprise a smectite clay. In yet another embodiment, the stabilizing agent can comprise bentonite. In still another embodiment, the stabilizing agent can comprise hectorite.

[0105] In one embodiment, the stabilizing agent is present in the slurry in an amount ranging from about 4 pounds per dry tonne kaolin to about 10 lbs per dry tonne kaolin.

[0106] In one embodiment, the slurry has a solids content of greater than about 45%, such as a solids content ranging from about 50% to about 60%.

[0107] Dispersants may be chosen from any art recognized dispersants for use in paper coating or paper filling compositions. Appropriate dispersants will be readily apparent to the skilled artisan. Dispersant may be chosen from polyelectrolytes such as polyacrylates and copolymers containing polyacrylate species, especially polyacrylate salts (such as sodium and aluminum optionally with a group II metal salt), sodium hexametaphosphates, non-ionic polyol, polyphosphoric acid, condensed sodium phosphate, non-ionic surfactants, alkanolamine and other reagents commonly used for this function.

[0108] The kaolin according to the present invention may be used as the sole pigment in the paper coatings and paper fillers of the present invention. Alternatively, the hyperplaty kaolin described above may be combined with another pigment. Additional pigments for use in the composition according to the present invention can be selected from any art recognized pigment. Pigments may be selected from other kaolin, calcined

kaolin, natural or precipitated calcium carbonate, titanium dioxide, calcium sulphate, satin white, talc or other plastic pigments. According to one embodiment of the present invention, a pigment can be TiO_2 . In exemplary compositions according to the present invention, TiO_2 is present in an amount ranging from 0 to 30 parts, such as from 5-20 parts or from 10-20 parts.

[0109] If cross linkers are used in the coating or filling composition for use with the present invention, crosslinkers are generally present in levels of up to 5% by weight. Any art recognized crosslinker may be used. Appropriate crosslinkers include, but are not limited to, glyoxals, melamine formaldehyde resins, ammonium zirconium carbonates and mixtures thereof.

[0110] If a water retention aid is used in the coating or filling composition for use with the present invention, water retention aids are generally present up to 2% by weight. Any art recognized water retention aid may be used. Appropriate water retention aids include, but are not limited to, sodium carboxymethyl cellulose, hydroxyethyl cellulose, PVA (polyvinyl acetate), starches, proteins, polyacrylates, gums, alginates, polyacrylamide bentonite and other commercially available products sold for such applications.

[0111] If a viscosity modifier or thickener is used in the coating or filling composition of the present invention, it is generally present in levels up to 2% by weight. Any art recognized thickener or viscosity modifier may be used. Appropriate viscosity modifiers or thickeners include, but are not limited to, polyacrylates, emulsion copolymers, dicyanamide, triols, polyoxyethylene ether, urea, sulphated castor oil, polyvinyl pyrrolidone, montmorillonite, CMC (carboxymethyl celluloses), sodium alginate, xanthan gum, sodium silicate, acrylic acid copolymers, HMC (hydroxymethyl celluloses), HEC (hydroxyethyl celluloses) and mixtures thereof.

[0112] If a lubricity/calender aid is used in the coating or filling composition of the present invention, it is generally present in levels up to 2% by weight. Any art recognized lubricity or calendering aid may be used.

Appropriate lubricity or calendering aids include, but are not limited to, calcium stearate, ammonium stearate, zinc stearate, wax emulsions, waxes, alkyl ketene dimer, glycols and mixtures thereof.

[0113] If an antifoamer or defoamer is used in the coating or filling composition of the present invention, it is generally present in levels up to 1% by weight. Any art recognized antifoamer or defoamer may be used.

Appropriate antifoamer and defoamers include, but are not limited to, blends of surfactants, tributyl phosphate, fatty polyoxyethylene esters plus fatty alcohols, fatty acid soaps, silicone emulsions and other silicone containing compositions, waxes and inorganic particulates in mineral oil, blends of emulsified hydrocarbons and other compounds sold commercially to carry out this function.

[0114] If dry or wet pick improvement additives are used in the coating or filling composition of the present invention, they are generally present in levels up to 2% by weight. Any art recognized dry or wet pick improvement additives may be used. Appropriate dry or wet pick improvement additives include, but are not limited to, melamine resin, polyethylene emulsions, urea formaldehyde, melamine formaldehyde, polyamide, calcium stearate, styrene maleic anhydride and mixtures thereof.

[0115] If dry or wet rub improvement and abrasion resistance additives are used in the coating or filling composition of the present invention, they are generally present in levels up to 2% by weight. Any art recognized dry or wet rub improvement and abrasion resistance additives may be used. Appropriate dry or wet rub improvement and abrasion resistance additives include, but are not limited to, glyoxal based resins, oxidized polyethylenes, melamine resins, urea formaldehyde, melamine formaldehyde, polyethylene wax, calcium stearate and mixtures thereof.

[0116] If a gloss-ink hold-out additive is used in the coating or filling composition of the present invention, it is generally present in levels up to 2% by weight. Any art recognized gloss-ink hold out additive may be used.

Appropriate gloss-ink hold out additives include, but are not limited to, oxidized polyethylenes, polyethylene emulsions, waxes, casein, guar gum, CMC, HMC, calcium stearate, ammonium stearate, sodium alginate and mixtures thereof.

[0117] If optical brightening agents (OBA) and fluorescent whitening agents (FWA) are used in the coating or filling composition of the present invention, they are generally present in levels up to 1% by weight. Any art recognized optical brightening agents (OBA) and fluorescent whitening agents (FWA) may be used. Appropriate optical brightening agents (OBA) and fluorescent whitening agents (FWA) include, but are not limited to, stilbene derivatives.

[0118] If a dye is used in the coating or filling composition of the present invention, it is generally present in levels up to 0.5% by weight. Any art recognized dye may be used.

[0119] If a biocide/spoilage control agent is used in the coating or filling composition of the present invention, it is generally present in levels up to 1% by weight. Any art recognized biocide/spoilage agent may be used. Appropriate biocides/spoilage agents include, but are not limited to, metaborate, sodium dodecylbenene sulphonate, thiocyanate, organosulphur, sodium benzonate and other compounds sold commercially for this function such as the range of biocide polymers sold by Calgon Corporation.

[0120] If a leveling aid is used in the coating or filling composition of the present invention, it is generally present in levels up to 2% by weight. Any art recognized leveling aid may be used. Appropriate leveling aids include, but are not limited to, non-ionic polyol, polyethylene emulsions, fatty acid, esters and alcohol derivatives, calcium stearate and other compounds sold commercially for this function.

[0121] If a grease and oil resistance additive is used in the coating or filling composition of the present invention, it is generally present in levels up to 2% by weight. Any art recognized grease and oil resistance additive may

be used. Appropriate grease and oil resistance additives include, but are not limited to, oxidized polyethylenes, latex, SMA (styrene maleic anhydride), polyamide, waxes, alginate, protein, CMC, HMC and mixtures thereof.

[0122] If a water resistance additive is used in the coating or filling composition of the present invention, it is generally present in levels up to 2% by weight. Any art recognized water resistance additive may be used. Appropriate water resistance additives include, but are not limited to, oxidized polyethylenes, ketone resin anionic latex, polyurethane, SMA, glyoxal, melamine resin, urea formaldehyde, melamine formaldehyde, polyamide, glyoxals, stearates and other materials commercially available for this function.

[0123] If an insolubilizer is used in the coating or filling composition of the present invention, it is generally present in levels up to 2% by weight. Any art recognized insolubilizer may be used.

[0124] The substrate to be filled or coated may be selected from any art recognized fibrous substrate. Substrates for use in the present invention include both wood based and woodfree substrates. Exemplary substrates according to the present invention are paper.

[0125] The present invention can be used in the production of all paper grades, from ultra lightweight coated paper to coated or filled board.

[0126] Lightweight coated, or LWC, paper is generally coated to a weight of from about 5 g.m^{-2} to about 13 g.m^{-2} on each side, and the total weight per unit area of the coated paper is generally in the range of from about 49 g.m^{-2} to about 65 g.m^{-2} .

[0127] LWC paper is generally used for printing magazines, catalogues and promotional material. The coated paper is required to meet certain standards of surface gloss and smoothness. For example, the paper is generally required to have a gloss value of at least about 32, and up to about 60, TAPPI units, and a Parker Print Surf value in the range of from about 0.5 to about 1.6 μm .

[0128] Ultra lightweight coated, or ULWC, paper is sometimes otherwise known as light lightweight coated, or LLWC, paper and is used for catalogues and for advertising and promotional material sent through the mail to reduce mailing costs. The coating weight is generally in the range of from about 2 g.m^{-2} to about 7 g.m^{-2} on each side, and the total weight per unit area of the coated paper is generally in the range of from about 25 g.m^{-2} to about 48 g.m^{-2} .

[0129] Methods of coating paper and other sheet materials are widely published and well known. See, for example, Pulp and Paper International, May 1994, page 18, et. seq. Sheets may be coated on the sheet forming machine, i.e., "on-machine" or they may be coated on a coating machine, i.e., "off-machine." Any art recognized coating method may be used to produce the coated sheet according to the present invention. According to one embodiment, the coating is applied to the sheet material by an applicator, and a metering device assures that the proper level of coating composition is applied. When an excess of coating composition is applied by the applicator, the metering device is downstream of the applicator. Alternatively, the correct amount of coating composition may be applied to the applicator by the metering device, such as a film press. While coating the sheet, the sheet may be supported by backing rolls or may be subjected only to tension.

[0130] Examples of known coaters which may be used with the present invention, include, but are not limited to, air knife coaters, blade coaters, rod coaters, bar coaters, multi-head coaters, roll coaters, roll/blade coaters, case coaters, liquid application systems, reverse roll coaters, extrusion coaters, and curtain coaters.

[0131] The present invention may be used in the production of coated paper for printing. Any art recognized method of printing may be used with the coated paper according to the present invention. Appropriate printing techniques will be readily apparent to the skilled artisan. Printing techniques for use according to the present invention include, but are not limited to,

rotogravure, offset printing, or flexo printing. Rotogravure involves the use of an engraved or etched cylinder as an image carrier. Image areas are etched or engraved below non-image areas in the form of tiny sunken cells. The cylinder is immersed in ink, and the excess ink is scraped off by a blade. When the substrate contacts the printing cylinder, ink transfers, forming the image. Offset printing is an indirect printing method in which the inked image on a press plate is first transferred to a rubber blanket that, in turn, "offsets" the inked impression to a press sheet.

[0132] The invention will be further clarified by the following examples, which are intended to be purely exemplary of the invention.

Examples

Example 1

[0133] This example illustrates a method of refining kaolin to produce a high shape factor kaolin, i.e., greater than or equal to 70, either as a dry kaolin or a kaolin slurry that is stabilized by adding additional water and carboxymethyl cellulose (a thickener). A "stabilized slurry" refers to a slurry where the kaolin does not appreciably settle out of solution over time. It would be expected that adding additional water would have provided a less stabilized slurry. By including a CMC (carboxymethylcellulose) thickener, a stabilized slurry is formed while decreasing the slurry solids. The stabilization process is performed as follows:

[0134] 1. The product is reblunged with a small amount of dispersant, such as 35/65 Mill Chem, which is a mixture of soda ash and polyacrylate.

[0135] 2. Add approximately 8 lbs/ton CMC to thicken and stabilize.

[0136] 3. Add biocide to prevent bacterial interaction with the CMC.

[0137] Figure 1 is a flowchart outlining the process of providing a high shape factor kaolin. A Georgia coarse crude kaolin is blunged, degrittied, and subjected to magnetic separation. After a first attrition grinding step with sand, the product is classified to separate the coarse fraction from the fines.

The coarse fraction is subjected to a second attrition grinding step, followed by leaching and filtering. A dry kaolin can be prepared by drying in a spray dryer, whereas a kaolin slurry can be prepared, such as a slurry further comprising CMC, biocide and a dispersant.

PROCESS PRODUCT	COARSE FRACTION FROM 1 ST ATTRITION GRINDING	COARSE FRACTION FROM 2 ND ATTRITION GRINDING	AFTER LEACHING**	AFTER SPRAY DRY
% solids	33.6%	33.1%	51.6%	1.0%
s.g.	1.262			
Tons	8.9		4.56	
pH				7.3
Brightness				86
L				94.27
a				-0.2
b				2.6
TiO ₂				0.612
Fe ₂ O ₃				0.44
Brookfield*				180
Hercules*				450
Panacea	74.7	99.8	99.9	93
PSD <2 m	39.3	56.9	56.5	56.0
<1 m	23.1		36.1	36.6
<.5 m	12.9		20.5	20.0
<.25 m	6.8		10.0	11.0
Recovery	100.0%	99.0%	98.0%	99.0%

*(60% solids)

**2 lbs/ton sodium hydrosulfite

Example 2

[0138] Figure 2 is a flowchart outlining a process for the preparation of a high shape factor kaolin. A Georgia crude kaolin is subjected to blunging and degritting steps, followed by magnetic separation and a first attrition grinding step. The product is then classified where the coarse fraction is subjected to a second attrition grinding step, followed by another classification to obtain a product where 70% of the particles have an esd less than 2 μ m.

This product is then leached and filtered, followed by the formation of either a dry kaolin product or a slurry.

PROCESS PRODUCT	COARSE FRACTION FROM 1 ST ATTRITION GRINDING	COARSE FRACTION FROM 2 ND ATTRITION GRINDING & CLASSIFYING	AFTER LEACHING**	AFTER SPRAY DRY
% solids	33.6%	25.5%	52.1%	1.2%
s.g.	1.262	1.184		
Tons	8.9	3.58		
Brightness			87.2	87.44
L				95.17
a				-0.18
b				2.77
TiO ₂				0.613
Fe ₂ O ₃				0.419
Brookfield*				160
Hercules*				480
Panacea	74.7		97.4	87.4
PSD <2 m	39.3	69.7		69.1
<1 m	23.1			48.0
<.5 m	12.9			28.4
<.25 m	6.8			15.0
Recovery	100.0%	57.3%	98.0%	99.0%

*(60% solids)

**2 lbs/ton sodium hydrosulfite

Example 3

[0139] This Example provides another process where a Georgia crude kaolin is reblunged and degrittled, as illustrated in the flowchart of Figure 3. After selective flocculation, the kaolin is subjected to magnetic separation. A coarse fraction from a size classification centrifuge is then added to the kaolin prior to a first attrition grinding step. After a size classification, the coarse fraction is subjected to a second attrition grinding step, followed by leaching and filtering to produce a high shape factor product.

PROCESS PRODUCT	Grinder Feed	Grinder Product	Coarse Fraction	AFTER LEACHING**	Spray Dry	Bird Rejects
% solids	32.7	32.1	29.6	43.9	96.2	54.1
Brightness	84.56	85.83	85.98	87.67	87.21	82.36
L	94.6	95.02	95.08	95.5	95.25	92.64
a	-0.2	-0.18	-0.13	-0.22	-0.19	-0.27
b	4.19	3.83	3.8	3.11	3.11	3.11
TiO ₂	0.613	0.635	0.652	0.639	0.63	0.666
Fe ₂ O ₃	0.394	0.406	0.43	0.385	0.375	0.382
Brookfield*					1360	
Hercules*					50 rpm	
Panacea	51.6	87.1	87.1	85.8	87.1	57.8
PSD <2 m	48	66.3	70.9	69.3	69.7	35.8
<1 m	27.2	44.2	49.2	46.9	47.4	20.4
<.5 m	13.6	24.3	28.3	26.3	26	10.1
<.25 m	4.8	7.8	10.6	10	11.6	2.7
Recovery		99%	88.1%	98%	99%	11.9%

*(60% solids)

**5 lbs/ton sodium hydrosulfite

Example 4

[0140] Figure 4 is a flowchart illustrating a process for making a barrier coating pigment from coarse fraction kaolin prepared according to the method of Example 1, where the barrier coating comprises kaolin having a shape factor of at least about 90:1. 5 gallons of coarse hyperplaty fraction kaolin is obtained in accordance with one of the previously described embodiments of the invention. The slurry is adjusted to have a solids content of 35%. 1 lb/ton C-211 is added, and more can be added if necessary. The batch is subjected to sand grinding to increase the percentage of particles having a size of less than 2 μ m by 24% to 26%. 3600 mL sand and 1800 mL clay slip was used. In the final slurry, at least 55% of the solids had a size less than 2 μ m.

[0141] The slurry was screened on a 325 mesh screen and flocculated to pH=3 with sulfuric acid. After filtering, the filter cake was

reblunged with SAPA (a blend of 35% Sodium Polyacrylate and 65% Soda Ash) to pH=6.5. Some of the reblunged filter cake was spray dried and added back to the slip to make a slurry having a solids content of 58% to 60%, but the slurry could optionally be as low as 50% solids or even 45% solids. The table below provides size distribution and shape factor values of the final product.

Brightness GE	85.79
PH	7.2
325 m Residue	0.0071
PSD % < 10 μ m	97.2
PSD % < 5 μ m	86.5
PSD % < 2 μ m	56.0
PSD % < 1 μ m	35.4
PSD % < .5 μ m	18
PSD % < .25 μ m	9.7
PSD % < .1 μ m	4
Visc. Brook #2 As Is	79
Visc. Herc rpm@18 dynes	400
Visc:Solids %	59.2
Panacea (shape factor)	92

[0142] Kaolin samples A-C were tested for grease and oil barrier properties. Samples A and B are known kaolin products whereas sample C is a kaolin product prepared in accordance with the method of Example 1. Barrier coatings were prepared as described in this Example, with these kaolin products.

	<i>Sample A - Comparative</i>	<i>Sample B - Comparative</i>	<i>Sample C - Invention</i>
--	-----------------------------------	-----------------------------------	---------------------------------

PSD% <2 μ m	82.4	89.9	56.0
Panacea -Shape Factor	35	58.9	92

[0143] Barrier coatings were applied to a 60 g/m² woodfree base sheet with a cylindrical laboratory coater. The coatings comprised the kaolin, calcium carbonate, latex, calcium stearate, and a viscosity modifier. The physical properties of the kaolins can be found in the table, above. The barrier coatings were applied twice on the same paper sample. The coated paper samples were finished on a laboratory scale calender.

[0144] The calendered paper samples were evaluated using a 3M Kit test in accordance with TAPPI procedure T559 pm-96 and for oil and grease resistance (OGR) in accordance with TAPPI procedure T509 cm-85. When using these test methods, higher values using the 3M kit are superior, while lower values when testing for oil and grease resistance are superior.

[0145] The 3M test kit was developed to determine the effectiveness of fluorochemical treated papers. The tests involve exposing the paper to a series of solution, which contain castor oil, heptane and toluene. There are 12 solutions of levels in the Kit test. As the Kit levels increase the proportion of solvent is larger.

[0146] The OGR test involves exposing the coated paper samples to a suitable oil or oil containing compound for a set period of time. The amount of oil that seeps through the coated sample and is absorbed on an underlying blotter is quantified. The test values from the OGR represent that percentage of the blotter paper covered by the oil. Thus, lower values are preferred. OGR values of 3 and less denote fully satisfactory products.

Sample No.	3M Kit (Coated)		OGR	
	Flat	Creased	Flat	Creased
Sample A	>12	<3	9	17
Sample B	>12	<3	11	21
Sample C	>12	<3	3	5

[0147] As can be seen from the table above, the sample according to the present invention provides stronger barriers when compared with prior art kaolins. Such results can be attributed to the high shape factor and large plate diameter associated with the kaolins of the present invention.

Example 5

[0148] Example 5 illustrates the utility of the inventive kaolin compositions as a component of a paper coating. Paper coating formulations were made up based upon 100 parts of pigment with 14 parts Dow 692 latex binder, 4 parts PROCOTE protein binder, 1.1 parts DISPEX polyacrylate dispersant, TiO_2 and kaolin were added as indicated in the Table, below.

Coating	A	B	C	D	E	F	G
Pigment							
Prior Art Kaolin	70	--	--	--	--	--	--
Invention Kaolin 1	--	70	85	100	--	--	--
Invention Kaolin 2	--	--	--	--	70	85	100
TiO_2	30	30	15	--	30	15	--
Dispex	0.1	0.1	0.1	0.1	0.1	0.1	0.1
Dow 692	14	14	14	14	14	14	14
Procote	4	4	4	4	4	4	4
pH	8.5	8.5	8.5	8.5	8.5	8.5	8.5
Brookfield Viscosity Spindle #2							
<u>cps@10</u> rpm	156	96	128	244	60	100	384
<u>cps@20</u>	108	68	102	156	48	74	244

Coating	A	B	C	D	E	F	G
rpm							
<u>cps@50</u> rpm	74	60	72	102	49	63	152
<u>cps@100</u> rpm	72	63	70	96	53	70	154

[0149] The kaolin properties are set forth in the Table below:

	PiPrior Art Kaolin	Invention Kaolin 1	Invention Kaolin 2
Brightness	90	91	92
2 micron	91	85.6	66.7
0.5 micron	35	34.4	18.1
Shape Factor	15	107	141
Surface Area	15	15.9	11.3
Steepness	45	37	33

[0150] The formulations were drawn down with wire wound rods onto a basestock. The fibrous substrate was coated to a coat weight of 15 gsm. The coatings were air dried and brightness and gloss were measured using Tappi standard methods. The results are set forth in the Table below.

Coating	A	B	C	D	E	F	G
Pigment Level	15.3	15.1	15.2	15.2	15.4	15.4	15.3
Brightness ISO							
Mean	65.8	69.4	64.8	54.9	68.7	66.2	57.8
St. Dev.	1.15	1.16	1.06	0.86	0.55	0.72	1.46
St. Error	0.36	0.37	0.34	0.27	0.17	0.23	0.46
N	10	10	10	10	10	10	10
Sheet Gloss (75)							

Coating	A	B	C	D	E	F	G
Mean	13.0	9.4	10.9	11.2	9.5	9.1	10.1
St. Dev.	1.05	0.89	0.49	0.64	1.23	0.92	1.34
St. Error	0.27	0.23	0.13	0.17	0.32	0.24	0.35
N	15	15	15	15	15	15	15

[0151] Samples according to the present invention exhibited improved brightness at accepted TiO_2 levels and comparable brightness at lower TiO_2 levels. See Figure 5 which plots the brightness results noted above as a function of TiO_2 content. Paper coated according to the present invention gives high brightness even with TiO_2 , significantly above the brightness of the uncoated sheet.

[0152] Thus, the inventive kaolin compositions are useful in applications wherein a high opacity, brightness or scattering are required, such as in brown board coating applications and may serve to reduce the amount of TiO_2 required therein. Further, although the present example illustrates the utility of the inventive kaolin as a paper coating, the composition could also be used to coat other substances wherein a high brightness or opacity coating is needed.

Example 6

[0153] To test the utility of the inventive kaolins as a filler, handsheets were prepared from a unbleached natural Kraft which has undergone no refining. While the present example pertains to use as a paper filler, it is anticipated that the inventive kaolins could also be useful as a high opacity filler for plastics and like materials.

[0154] The handsheets were made with a TAPPI sheet mold at a pH of 4.5. The sheets were made on a fourdrier paper machine using unbleached hardwood kraft. The conditions are discussed in the table, below.

pH	6.75
Freeness (CSF)	470
Freeness (CSF) after beating	380
Britt Fines	
% Fiber	80.3
% Fines	18.9
% Ash	0.8
Brightness	22.7
Specific Conductivity	1750
Mutek PCD:	-340
Total Dissolved Solids	2327 ppm
Inorganic Dissolved	1880 ppm

[0155] The handsheets were air dried and a range of properties were measured for unfilled sheets, sheets made using the commercially available prior art pigment ASTRAPLATE (available from Imerys, Inc.) and two sets of samples using the composition identified as Invention Kaolin 2 in Example 5 above. The ASTRAPLATE and Invention 2 Samples included 2 lbs per ton of a commercially available retention aid of a sort that would be readily obtainable by one of ordinary skill in the art.

Sample	1	2	3	4	5
Description	Unfilled	Unfilled	Prior Art Astraplate	Invention Kaolin 2	Invention Kaolin 2
%Ash (450))	0.7	0.7	5.9	12.3	23.9
% Ash (900)	2.1	0.6	4.6	12.2	21.4
GSM	53.9	51.4	52.4	51.5	52.3
Sheet Brightness	19.9	20.1	22.8	29.4	38.5
Opacity	88.4	88.2	90.3	94.2	96.2
F8 Sheet Scatter	179	220	236	307	524
F8 Absorption	271.5	318.8	295.9	246.4	246.7
F10 Sheet Scatter	208	213	241	341	481

Sample	1	2	3	4	5
Description	Unfilled	Unfilled	Prior Art Astraplate	Invention Kaolin 2	Invention Kaolin 2
F10 Absorption	176.1	168.7	168.3	157.6	132.7
Pigment Scatter	--	--	807	1073	1557
Gurley Porosity	13.22	11.23	13.97	20.25	22.25
Burst Factor	45.4	44.6	40.2	28.6	17.2
Sheffield Smoothness	293	277	276	261	252

Example 7

[0156] Filled paper was made using a bleached hardwood, softwood mixture beaten to a 400 Canadian Standard Freeness (CSF), a retention aid, and Invention Kaolin 2 of Example 5. The pH was maintained at 5.0. Handsheet were made and allowed to air dry. A range of properties were measured.

Sample	1	2	3	4
Description	Unfilled	Invention Kaolin 2	Invention Kaolin 2	Invention Kaolin 2
Retention Aid in Toms	1	1	1	1
Headbox %Ash (450))	--	7.62	21.12	28.13
% Retention on (450)	--	85	58.2	74.1
Handsheet % Ash (450)	--	6.48	12.29	20.84
GSM	58.6	59.2	57.5	57.4
Sheet Brightness	83.8	85.3	85.9	86.7
Opacity	73.9	79.5	83.1	87.2
Sheet Scatter	351	457	541	695
Absorption	4.9	5.8	6.3	7.1
Caliper	3.839	3.851	3.788	3.736
Bulk	1.66	1.65	1.67	1.65
Pigment Scatter	--	1987	1897	2002
Gurley Porosity	7.9	10.2	9.3	14.2

Sample	1	2	3	4
Description	Unfilled	Invention Kaolin 2	Invention Kaolin 2	Invention Kaolin 2
Sheffield Smoothness	271293	251	244	206

[0157] As can be seen from the table above, the pigment light scatter according to the present invention (1900-2000 cm²/g) compares favorably with that which can be achieved using calcined clay at 2500 and standard filler clay at 1100.

Example 8

[0158] In this example, a series of coarse fractions, i.e., "b-fraction" clays were subjected to attrition grinding to determine which clays result in high shape factor extenders while retaining particle size. The properties of the resulting materials were assessed to determine which materials provided high opacity and low sheen in a high PVC paint formulation.

[0159] Carbolite grinding experiments with fine (20-40 lbs) Carbolite grinding media were performed on four materials: (1) Invention Kaolin 3, (see column 0), having a coarse, platy character; (2) Invention Kaolin 4 from a Bird centrifuge, having a coarser, platy character (see column 0); (3) a Georgia feed clay (DBK 110 Contour 100, Imerys), a Dry Branch feed clay; and (4) a fine particle size clay (K20, Imerys), a Kaopaque 20 product that had already been processed to a fine particle size. Physical properties of the ground clay are shown in the Table, below.

	Invention Kaolin 3	Invention Kaolin 4						
Energy kwh/t	0	50	100	150	0	50	100	1560
Colour								
ISO B'ness	81.5	84.7	85.7	86.5	74.7	75.7	75.4	75.7
Yellowness	6.9	5.8	5.6	4.8	8.3	8.7	9.1	8.9
L*	94.8	95.8	96.1	96.2	92.2	92.8	92.8	92.9
a*	0.24	-0.05	0.03	-0.13	0.77	0.62	4	0.54
b*	4.54	3.88	3.64	3.22	5.57	5.89	6.12	6.01
Sedigraph								

	Invention Kaolin 3	Invention Kaolin 4						
<10 μ m	92.5	98.9	98.7	99.5	87.6	99.2	98.7	99
< 8 μ m	86.9	97.8	98.6	98.8	72.6	98.5	98.3	98.4
< 5 μ m	86.6	91.5	96.7	97.1	64.5	96.3	96.3	96.5
< 2 μ m	27.5	62.9	79.1	83.1	28.3	76.7	81	83.7
< 1 μ m	18	41.8	59.6	64.8	19	53.3	62.6	67
< 0.75 μ m	14.9	33.8	50.8	57.3	16.3	44.8	55.4	59.5
< 0.50 μ m	11.1	23.3	35.4	43	13.1	32.3	42.3	45.6
< 0.25 μ m	5.8	10.1	13.7	17.2	7	15.1	17.3	18.7
< 0.10 μ m	1.9	4.7	3.1	5.3	1.7	5.7	4.1	5.2
d50	2.94	1.22	0.77	0.64	3.01	0.86	0.67	0.6
Steepness*	32	30	32	31	27	30	29	31
S.F. [†]	28.8	89	96	98.8	18.7	101	103	98.3
S.A. [‡]	7.49		13.22		9.52		13.48	

* Steepness is given by $d_{30}/d_{70} \times 100$. Increasing steepness indicates a narrower PSD.

[†] S.F. = Shape factor

[‡] S.A. = Surface area

	Georgia Feed Clay	Fine Particle Size Clay						
Energy kwh/t	0	50	100	150	0	50	100	150
Colour								
ISO B'ness	81.6	84.2	84.5	85	84.4	85.8	85.8	86.3
Yellowness	7.9	6.7	6.5	6.1	6.4	5.6	5.7	5.3
L*	95.1	95.8	95.9	96	95.8	96.1	96.1	96.2
a*	0.16	0.02	0	-0.03	0.08	0.02	0.02	-0.03
b*	5.21	4.39	4.27	4	4.17	3.67	3.7	3.48
Sedigraph								
<10µm	90.4	98.5	99.6	99.2	99.6	99.9	99.8	99.3
< 8µm	86.9	98.3	99	98.8	99.2	99.9	99.9	99.4
< 5µm	78.8	97.1	98	99	95.5	99.2	99	99.3
< 2µm	55.6	84.4	87.8	93.4	79.7	91.4	92	95.2
< 1µm	42.1	65.5	69	81.2	63.9	78.5	79.5	86.1
< 0.75µm	36.1	54.9	58.7	72.8	57	72.1	72.1	80.4
< 0.50µm	27.4	39.7	43.1	56.3	45.7	59	58.4	68.2
< 0.25µm	13.4	20.54	21.3	25.7	25	32.8	31.8	39.2
< 0.10µm	5.7	9	7.4	8.8	10.4	12.6	12.8	15.9
d50	1.4	0.65	0.59	0.44	0.6	0.4	0.41	0.32
Steepness	19	31	33	38	25	31	32	35
S.F.	7.3	37.5	37.5	42	29.9	45.7	44.3	43.5

* Steepness is given by $d_{30}/d_{70} \times 100$. Increasing steepness indicates a narrower PSD.

† S.F. = Shape factor

‡ S.A. = Surface area

Other Properties

Rheology

[0160] In all cases Carbolite grinding had a small but significant effect on the rheology. As the grinding energy input increased there was an

increase in both the Brookfield and Rotathinner viscosities, while the high shear (cone and plate) viscosity did not change.

Scrub and stain resistance

[0161] As expected, scrub and stain resistances worsened as the opacity increased.

Color

[0162] The ground Invention Kaolin 3 had good color, better than the existing fine particle size clay product. Further improvements may be possible through bleaching of the ground clay.

Conclusions

[0163] The light Carbolite grinding of Invention Kaolin 3 can provide a product comprising a coarse, high shape factor clay giving a combination of low sheen with significant opacity improvements. These results reflect the performance of a small batch of material. The more highly ground Invention Kaolin 3 can have a fine high shape factor clay giving large opacity improvements, at the cost of increased sheen. Such a product may offer an alternative to calcined clays in formulations where high scrub resistance is not regarded as important.

Opacity and Sheen

[0164] Figure 6 presents the opacity and sheen of the ground clays in the high PVC formulation. The clays were prepared by grinding with fine Carbolite media. The grinding energy is indicated by the size of each point. To allow comparison some standard clays (SUPREME and GLOMAX LL*, all of which are Imerys clay products) are plotted.

Invention Kaolin 3

[0165] The 50 kwh/t ground Invention Kaolin 3 rejects gave a noteworthy combination of high opacity and low sheen.

[0166] The 100 kwh/t ground Invention Kaolin 3 gave high opacity with high sheen.

Other feeds

[0167] Invention Kaolin 4 had a poor color, a substantial part of their opacity originated from absorption, rather than scattering of light. They also ground to a finer particle size than Invention Kaolin 3, resulting in higher sheen.

[0168] A 1.5 unit increase in opacity was achievable by Carbolite grinding of the fine particle size clay feed material. Similar opacities were obtained with the ground Georgia Feed Clay. For these materials, any increase in opacity was always accompanied by a significant increase of the sheen, brought about by a decreasing particle size.

[0169] Chemical and mineralogical analysis of the US feed clays are provided in the Table below.

Chemical and mineralogical analysis of the clays used in Example 8.

	Invention Kaolin 3	Invention Kaolin 4	Georgia Feed Clay	Fine particle size clay
XRF Analysis				
SiO ₂	45.08	44.93	46.51	46.49
Al ₂ O ₃	39.54	38.91	37.79	37.91
Fe ₂ O ₃	0.29	0.61	0.33	0.44
TiO ₂	0.89	1.42	1.24	1.05
CaO	0.05	0.01	0.05	0.05
MgO	<.01	0.02	0.04	0.05
K ₂ O	0.23	0.56	0.04	0.05
Na ₂ O	0.14	0.21	0.09	0.09
L.O.I.	13.79	13.33	13.91	13.88
XRD Analysis				
Kaolin	98	94	99	98
Mica	2	6	1	2
Quartz	<0.5	<0.5	0	0
Feldspar	0	0	0	0

[0170] Figure 7 is a plot of the d₅₀ versus shape factor. For each of the four feeds, the Carbolite grinding resulted in an increase in the clay's

shape factor, and a decrease in the mean particle size. From Figure 7, it can be seen that Invention Kaolin 3 and Invention Kaolin 4 yielded the highest shape factors. Invention Kaolin 4 suffered from poor color, with an ISO brightness of 75.7.

Example 9

[0171] The ground products of Example 8 were tested in a series of paints using a generic high PVC paint formulation, as exemplified in the Table below.

<i>Simplified matt paint formulation.</i>		
	Weight %	Weight / pounds per US gallon
Tipure R706 TiO ₂	9.0	1.11
Extender	10.0	1.23
Carbital 120	30.0	3.70
Dispex N40	0.35	0.04
Calgon S	0.05	0.01
Ammonia 0.880	0.15	0.02
Natrosol 250 MBR	0.3	0.04
Nopco NXZ	0.3	0.04
Proxel GXL	0.1	0.01
Propylene Glycol	2.0	0.25
Texanol	1.4	0.17
Acronal 290D latex	13.0	1.60
Primal TT935	0.8	0.10
Water	32.55	4.02
Total =	100.00	
%PVC	74.09	

<i>Simplified matt paint formulation.</i>		
	Weight %	Weight / pounds per US gallon
Specific gravity, g/cm ³	1.479	
Solids wt. %	56.25	
Solids vol. %	34.35	

[0172] The opacity, gloss, stain resistance, BS scrub loss and mud crack resistance values are shown in the Table below.

Comparison of the Carbolite ground US clays as extenders.

Paint No. →	154	159	160	161	162	163
Extender	Supreme	G.F.C.**	G.F.C	G.F.C	I.K.4*	I.K.4
Work / kwh/t	-	50	100	150	50	100
Brookfield viscosity, poise						
@ 1 r.p.m.	2960	1250	1340	1580	1160	1270
@ 10 r.p.m.	430	202	214	239	182	213
@ 100 r.p.m.	65.4	42.2	42.5	44.7	40	43.8
Rotathinner, poise	12.1	9.7	9.9	10	10.4	10.6
Cone & Plate, poise	1.4	1.2	1.2	1.2	1.3	1.3
Opacity @ 20 m ² /l	90.3	90.1	90.2	90.8	92.7	93.0
S, mm ⁻¹	78.2	76.1	76.6	80.3	90.1	92.0
K, mm ⁻¹	0.3	0.4	0.4	0.4	0.7	0.7
Gloss @ 60°	3	3.3	3.3	3.2	2.9	2.9

Comparison of the Carbolite ground US clays as extenders.

Paint No. →	154	159	160	161	162	163
Extender	Supreme	G.F.C.**	G.F.C	G.F.C	I.K.4*	I.K.4
Work / kwh/t	-	50	100	150	50	100
Brookfield viscosity, poise						
Gloss @ 85°	3.4	3.3	3.7	3.7	3.7	3.9
L*	96.39	96.22	96.25	96.28	95.39	95.34
a*	-0.68	-0.39	-0.38	-0.4	0.03	0.05
b*	2.21	3.38	3.37	3.24	3.78	4
Stain resistance, %	83.4	80.6	79.2	80.0	72.9	73.4
BS scrub loss [†] , mg cm ⁻²	5.80	6.24	6.26	6.34	8.14	8.17
Mud crack resistance, μm	1500	1350	1350	1500	1500	1400

* I.K.4 = Invention Kaolin 4

**G.F.C = Georgia Feed Clay

[†] BS scrub loss, 100 cycles, 7 days

Paint No. →	164	165	155	156	157	158
Extender	I.K.3 [†]	I.K.3	F.P.S.C.*	F.P.S.C.	F.P.S.C.	F.P.S.C.
Work / kwh/t	50	100	0	50	100	150
Brookfield viscosity, poise						
@ 1 r.p.m.	1220	1370	1190	1470	1520	1730

Paint No. →	164	165	155	156	157	158
Extender	I.K.3 [‡]	I.K.3	F.P.S.C.*	F.P.S.C.	F.P.S.C.	F.P.S.C.
Work / kwh/t	50	100	0	50	100	150
@ 10 r.p.m.	189	210	209	249	246	277
@ 100 r.p.m.	42	43.5	44.6	45.8	46	50.5
Rotothinner, poise	10.2	10.3	10	10.4	10.4	10.6
Cone & Plate, poise	1.2	1.3	1.3	1.3	1.2	1.3
Opacity @ 20 m ² /l	90.9	92.0	89.3	90.8	90.6	90.9
S, mm ⁻¹	81.9	89.6	71.7	80.0	79.0	81.1
K, mm ⁻¹	0.3	0.3	0.4	0.4	0.4	0.4
Gloss @ 60°	3.3	3.3	3.2	3	3.3	3.1
Gloss @ 85°	2.9	3.8	2.8	3.6	3.5	3.5
L*	96.71	96.86	96.19	96.32	96.32	96.4
a*	-0.43	-0.44	-0.41	-0.42	-0.42	-0.37
b*	2.62	2.48	3.25	3.03	3.05	2.96
Stain resistance, %	73.3	72.3	82.5	80.1	81.9	82.5
BS scrub loss†, mg cm ⁻²	7.19	7.96	5.66	6.67	6.58	7.02
Mud crack resistance, μm	1350	1500	1350	1050	1500	1150

[‡] I.K.3 = Invention Kaolin 3

*F.P.S.C. = fine particle size clay

[0173] In all cases, Carbolite grinding had a small but significant effect on the rheology. As the grinding energy input increased, there was an increase in both the Brookfield and Rotothinner viscosities, while the high shear (cone and plate) viscosity did not change.

[0174] Scrub and stain resistances worsened as the opacity increased.

[0175] Invention Kaolin 3 had good color in that it is better than that of the existing fine particle size clay product.

Example 10

[0176] Figure 8 is a flowchart outlining a process where two coarse fractions are combined, followed by leaching and filtering to produce a stabilized high-solids slurry by adding a stabilizing agent such as carboxymethylcellulose or a smectite clay (i.e. bentonite, hectorite, montmorillonite, etc.). To illustrate this, a two tote sized samples (~250-300 gallons) of the inventive product of Example 9 were made down by blunging with a 65/35 SAPA (soda ash/sodium polyacrylate) dispersant package to a pH of 6.5. The two sample totes of the product were each treated with biocide (1 lb/dry tonne Proxel) then treated with 8 lbs/dry tonne of the carboxymethylcellulose PE-30 EX. The final solids content of Sample 1 was 52% and the final solids content of sample 2 was 49.6%. The initial Hercules viscosity of samples 1 and 2 were measured using a no. 2 spindle at 20 rpm and found to be 30 cps and 18 cps respectively. The initial Hercules viscosity of sample 1 was measured as 8.5 dynes at 4400 rpm at pH 7.2 and the initial Hercules viscosity of sample 2 was measured as 5.0 dynes at pH 7.0.

[0177] Next, the stability over time of the slurries was measured and the results are displayed in the following table. One pint samples were set aside and allowed to settle for a desired amount of time, after which the Brookfield viscosity of the top and bottom portion of each sample was measured using a 'T' bar at ½ rpm. If the slurry was not stable, one would expect the measured viscosity to rise over time to a maximum value of approximately 400,000.

Sample Loc.	0 Day	14 Day	21 Day	28 Day
Sample 1 – Top	6,800	16,000	15,200	14,000
Sample 1 – Bottom	6,800	18,000	22,400	21,200
Sample 2 – Top	6,000	14,400	14,400	14,000
Sample 2 – Bottom	6,000	14,800	16,400	17,600

[0178] At the end of the 28 day test period, each one pint sample was subjected to a pour test wherein it was upended and allowed to pour for 1 minute. In this time approximately 93.4% sample 1 and 94.9% of sample 2 was seen to pour from the container, illustrating the continued fluidity of the sample. A similar test performed on each entire tote (~250-300 gallons) of samples 1 and 2 resulted in 99.7% and 99.2% pouring respectively. As can be seen from the pour test results and the above table, the CMC stabilized slurry is basically stable, which is surprising in light of the fact that the make down process with CMC results in an effective decrease in the slurry solids. Generally this process should be useful in relation to slurries having a solids content, for example, in the range of greater than about 45%, between about 45% and about 60%, or even in the range of about 50 to about 60%.

[0179] Unless otherwise indicated, all numbers expressing quantities of ingredients, reaction conditions, and so forth used in the specification and claims are to be understood as being modified in all instances by the term "about." Accordingly, unless indicated to the contrary, the numerical parameters set forth in the following specification and attached claims are approximations that may vary depending upon the desired properties sought to be obtained by the present invention.

[0180] Other embodiments of the invention will be apparent to those skilled in the art from consideration of the specification. Other embodiments of the invention will be apparent to those skilled in the art from consideration of the specification and practice of the invention disclosed herein. It is intended that the specification and examples be considered as exemplary only, with a true scope and spirit of the invention being indicated by the following claims.

We Claim:

1. A composition comprising kaolin having a shape factor of at least about 70:1.
2. The composition according to claim 1, wherein the kaolin has a shape factor of at least about 80:1.
3. The composition according to claim 1, wherein the kaolin has a shape factor of at least about 90:1
4. The composition according to claim 1, wherein the kaolin has a shape factor of at least about 100:1
5. A coating composition, comprising:
 - kaolin having a shape factor of at least about 70:1;
 - a binder; and
 - optionally a dispersant.
6. The composition according to claim 5, further comprising an additional pigment.
7. The composition according to claim 6, wherein the additional pigment is TiO_2 .
8. The composition according to claim 7, wherein said composition has a ratio of kaolin to TiO_2 of less than about 85:15 parts by weight.
9. A filler comprising kaolin having a shape factor of at least about 70:1.
10. The filler according to claim 9, wherein the kaolin has a shape factor of at least about 80:1.
11. The filler according to claim 9, wherein the kaolin has a shape factor of at least about 90:1.
12. The filler according to claim 9, wherein the kaolin has a shape factor of at least about 100:1.
13. A method of making a coated paper comprising:

coating a fibrous substrate with a paper coating composition comprising a filler comprising kaolin having a shape factor of at least about 70:1.

14. The method according to claim 13, wherein the kaolin has a shape factor of at least about 80:1.

15. The method according to claim 13, wherein the kaolin has a shape factor of at least about 90:1

16. The method according to claim 13, wherein the kaolin has a shape factor of at least about 100:1.

17. A method of making a filled paper comprising
providing a fibrous substrate;
adding to said substrate kaolin having a shape factor of at least about 70:1.

18. The method according to claim 17, further comprising adding a retention aid.

19. The method according to claim 17, wherein the kaolin has a shape factor of at least about 80:1.

20. The method according to claim 17, wherein the kaolin has a shape factor of at least about 90:1.

21. The method according to claim 17, wherein the kaolin has a shape factor of at least about 100:1.

22. A coated paper comprising:
a fibrous substrate; and
a coating on said substrate comprising kaolin having a shape factor of at least about 70:1.

23. The method according to claim 22, wherein the kaolin has a shape factor of at least about 80:1.

24. The method according to claim 22, wherein the kaolin has a shape factor of at least about 90:1.

25. The method according to claim 22, wherein the kaolin has a shape factor of at least about 100:1.

26. A method of improving barrier properties in paper comprising:
coating a fibrous substrate with a coating composition
comprising kaolin having a shape factor of at least about 70:1.

27. The method according to claim 26, wherein said coating further comprises a binder.

28. The method according to claim 27, wherein said binder is a latex binder.

29. The method according to claim 27, wherein said binder is present in an amount ranging from about 40% to about 50% by weight.

30. The method according to claim 26, wherein the kaolin has a shape factor of at least about 80:1.

31. The method according to claim 26, wherein the kaolin has a shape factor of at least about 90:1.

32. The method according to claim 26, wherein the kaolin has a shape factor of at least about 100:1.

33. A method of refining kaolin, comprising:
providing a kaolin slurry;
attrition grinding the kaolin slurry;
removing a coarse particle size fraction from the slurry by
centrifugation; and
attrition grinding the coarse-particle size fraction to provide a
kaolin product having a shape factor of at least about 70:1.

34. The method according to claim 33, wherein the kaolin slurry comprises whole crude kaolin or a blend of whole crude and coarse-particle size fractions from a centrifuge.

35. The method according to claim 33, wherein the kaolin product has a shape factor ranging from about 70:1 to about 140:1.

36. The method according to claim 33, wherein the kaolin product has a shape factor ranging from about 80:1 to about 100:1.

37. The method according to claim 33, wherein the kaolin slurry is beneficiated prior to the attrition grinding.

38. The method according to claim 33, wherein the kaolin slurry is degrittled prior to the attrition grinding.

39. The method according to claim 33, wherein the kaolin slurry comprises a blunged-degrittled-brightness beneficiated slurry.

40. The method according to claim 33, wherein the coarse particle size fraction that is removed comprises kaolin particles comprising from 80% to 95% by weight of the particles having an esd of less than 2 μm .

41. The method according to claim 33, wherein the kaolin product resulting from attrition grinding the coarse particle size fraction comprises particles having an esd ranging from 0.2 μm to 1.7 μm .

42. The method according to claim 33, wherein the kaolin product resulting from attrition grinding the coarse particle size fraction comprises particles having a shape factor value ranging from 80:1 to 110:1.

43. The method according to claim 33, wherein the kaolin product has a shape factor of at least about 80:1.

44. The method according to claim 33, wherein the kaolin product has a shape factor of at least about 90:1.

45. The method according to claim 33, wherein the kaolin product has a shape factor of at least about 100:1.

46. An extender for paint comprising kaolin, prepared by a method comprising:

providing a kaolin slurry comprising whole crude kaolin or a blend of whole crude and coarse-particle size fractions from a centrifuge;
attrition grinding the kaolin slurry;
removing a coarse particle size fraction from the slurry by centrifugation; and

attrition grinding the coarse-particle size fraction to provide a kaolin product having a shape factor of at least about 70:1.

47. The extender according to claim 46, wherein the kaolin product has a d_{50} ranging from 0.1 μm to 2.0 μm .

48. The extender according to claim 46, wherein the kaolin product has a d_{50} ranging from 0.5 μm to 1.5 μm .

49. The extender according to claim 46, wherein the kaolin product has a shape factor ranging from about 80:1 to about 100:1.

50. The extender according to claim 46, wherein the kaolin product has a shape factor of at least about 80:1.

51. The extender according to claim 46, wherein the kaolin product has a shape factor of at least about 90:1.

52. The extender according to claim 46, wherein the kaolin product has a shape factor of at least about 100:1.

53. A barrier coating composition, comprising a slurry comprising kaolin having a shape factor of at least about 70:1, the solids content of the slurry ranging from about 45% to about 70%.

54. The barrier coating composition according to claim 53, wherein the kaolin has a shape factor of at least about 80:1.

55. The barrier coating composition according to claim 53, wherein the kaolin has a shape factor of at least about 90:1.

56. The barrier coating composition according to claim 53, wherein the kaolin has a shape factor of at least about 100:1.

57. A slurry comprising kaolin having a shape factor of greater than 70:1 and a stabilizing agent.

58. The slurry according to claim 57, wherein said stabilizing agent comprises carboxymethylcellulose.

59. The slurry according to claim 57, wherein said stabilizing agent comprises a smectite clay.

60. The slurry according to claim 57, wherein said stabilizing agent comprises bentonite.

61. The slurry according to claim 57, wherein said stabilizing agent comprises hectorite.

62. The slurry according to claim 57, wherein said stabilizing agent is present in the slurry in an amount ranging from about 4 pounds per dry tonne kaolin to about 10 lbs per dry tonne kaolin.

63. The slurry according to claim 57, wherein said slurry has a solids content of greater than about 45%.

64. The slurry according to claim 57, wherein said slurry has a solids content ranging from about 50% to about 60%.

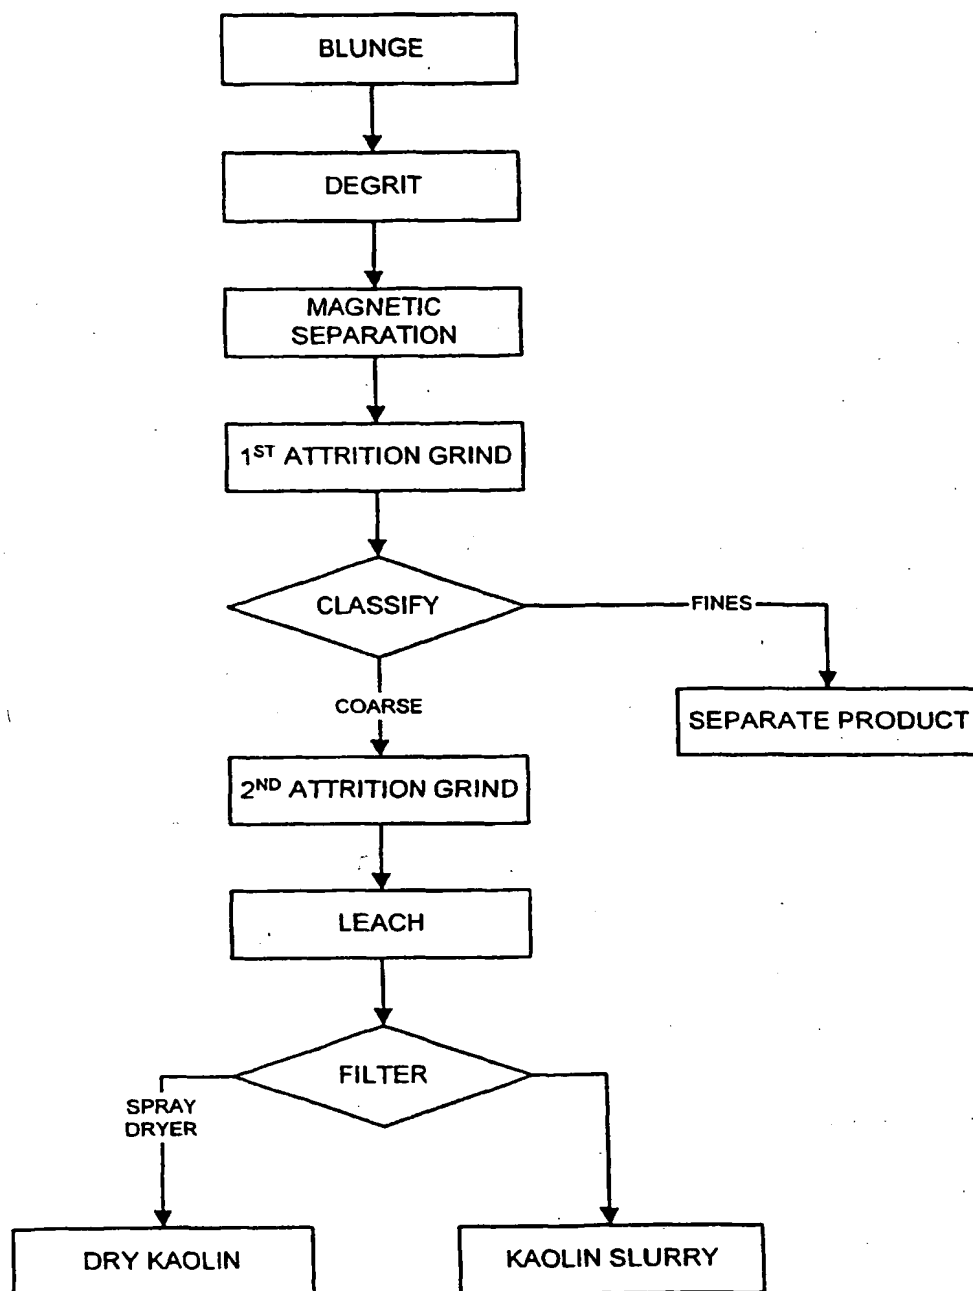


FIGURE 1

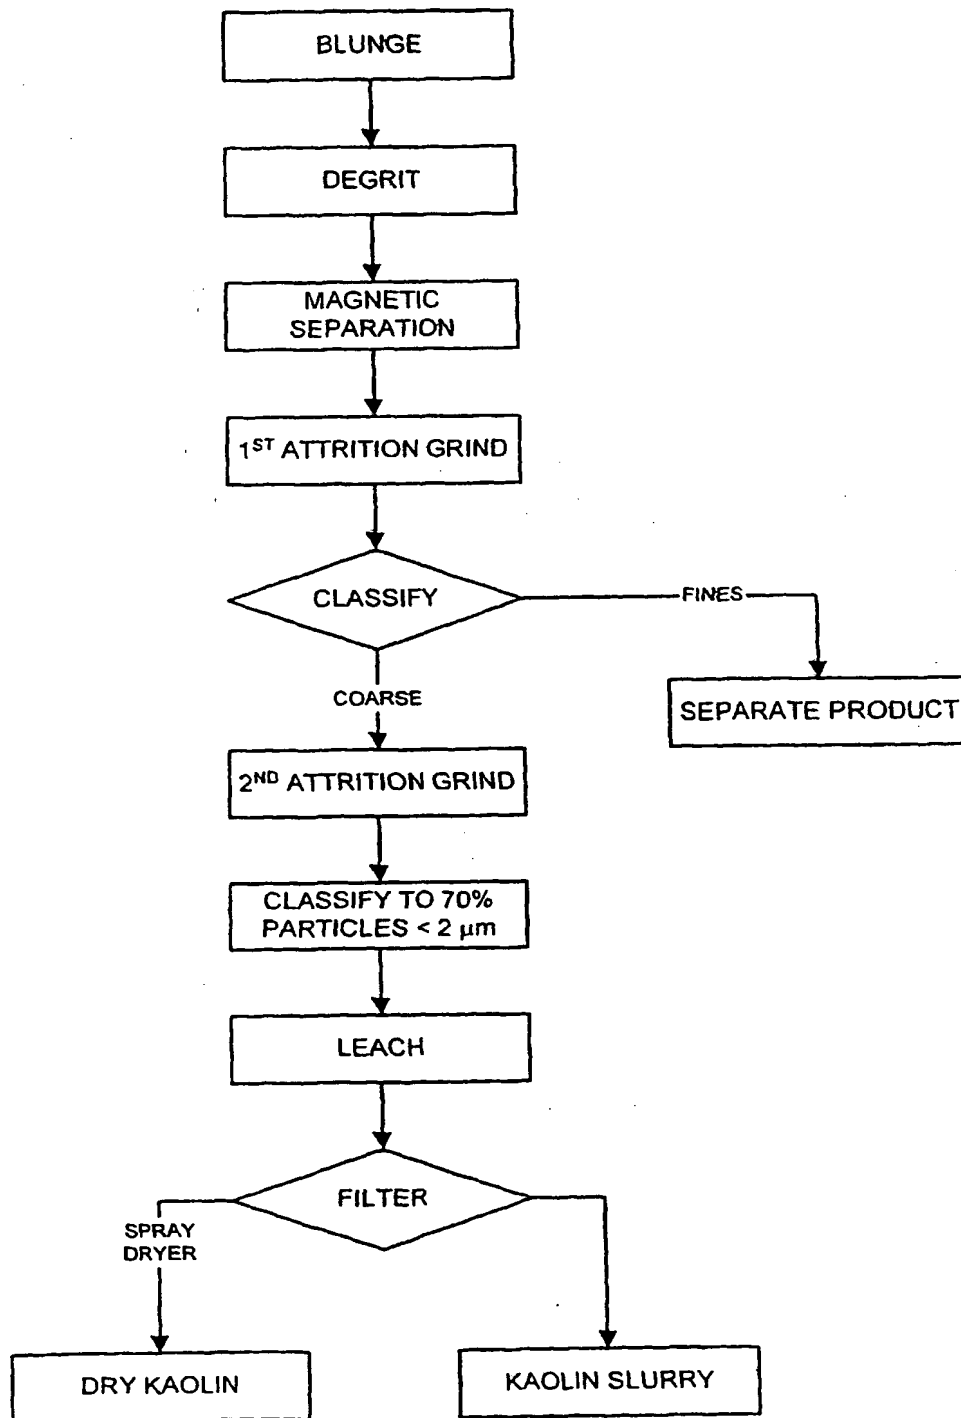


FIGURE 2

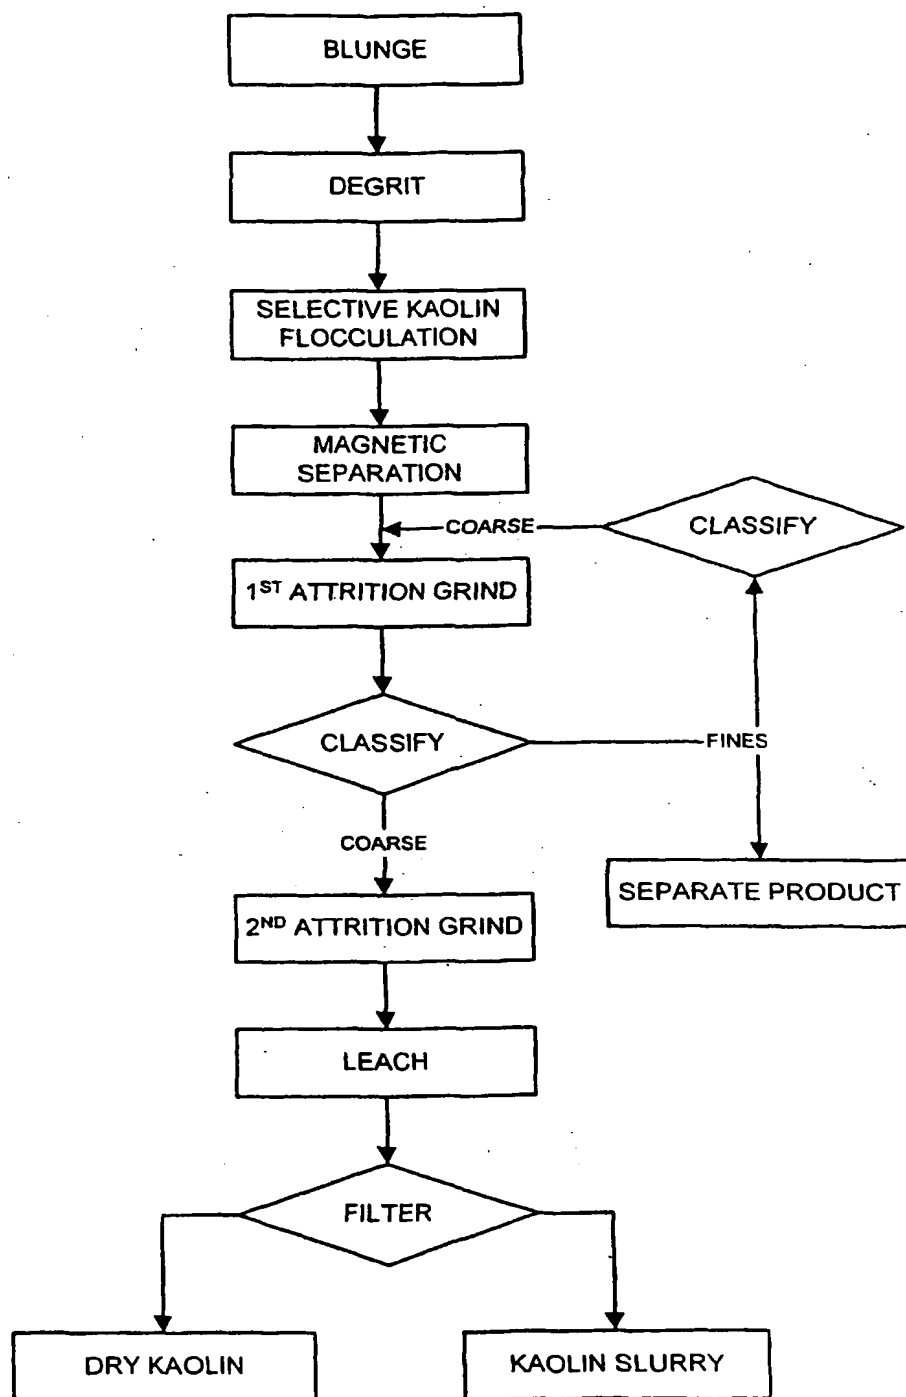


FIGURE 3

Hyperplaty Pigment

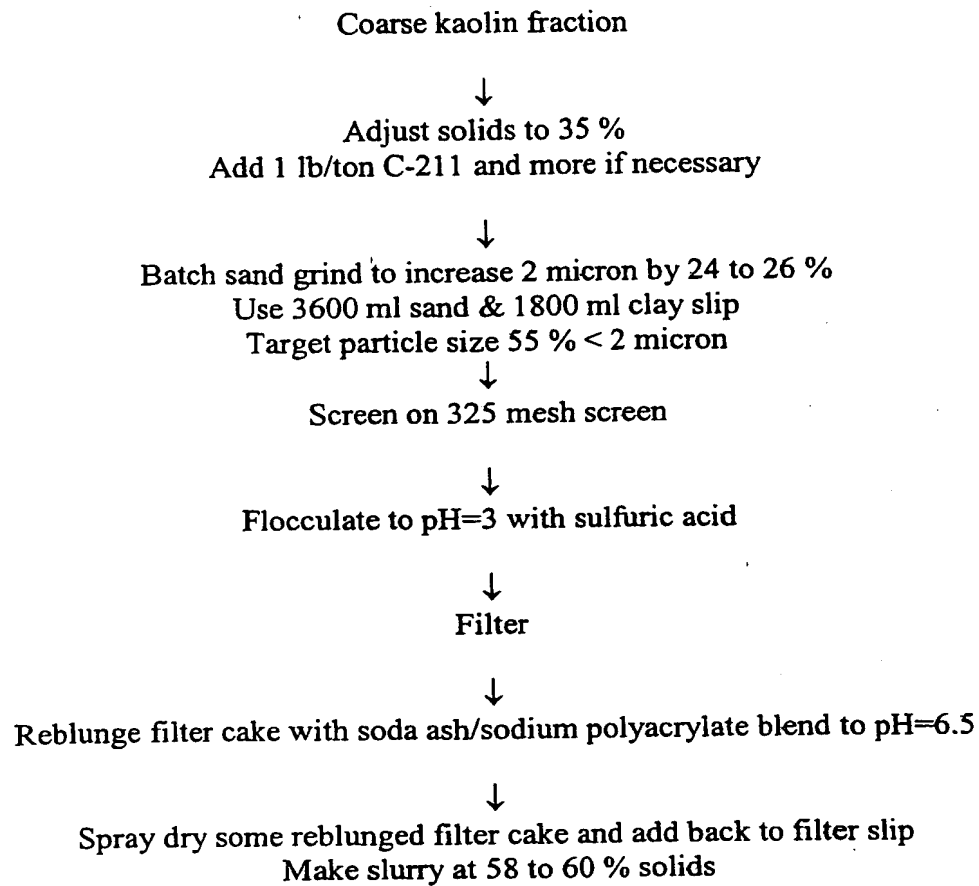


FIGURE 4

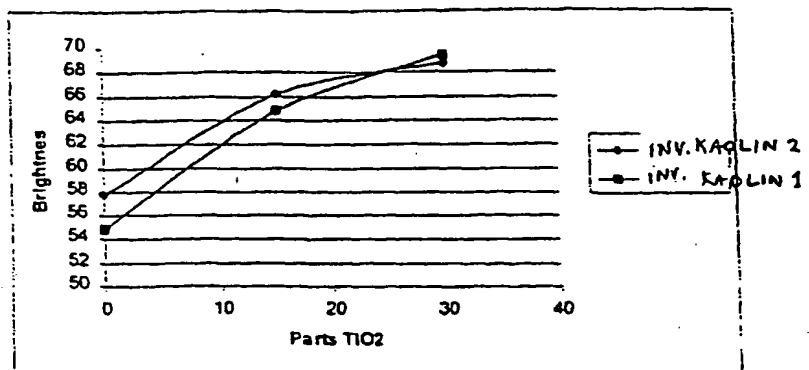


FIG 5

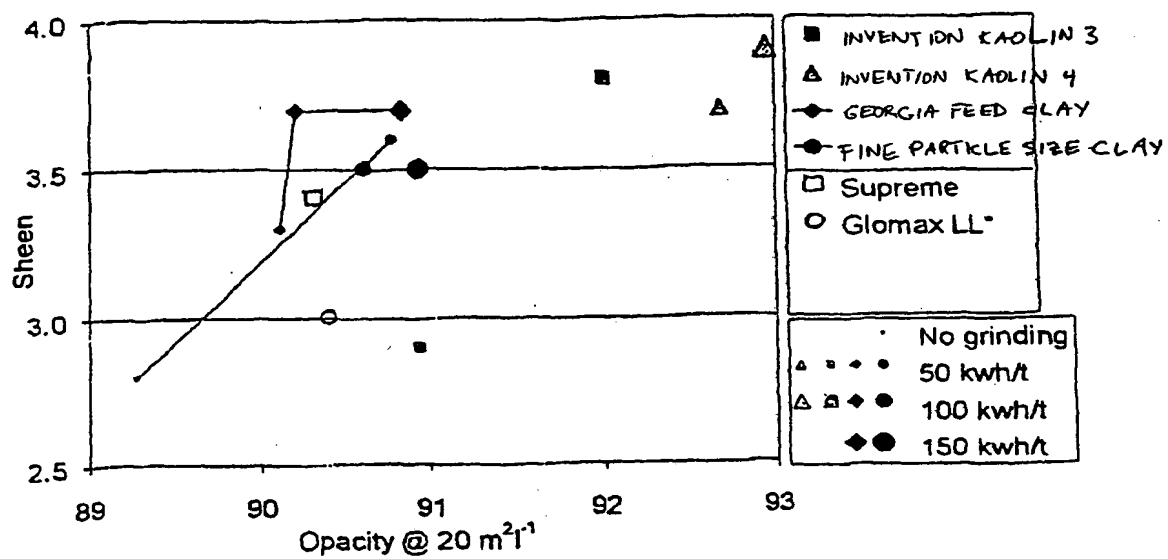


FIGURE 6


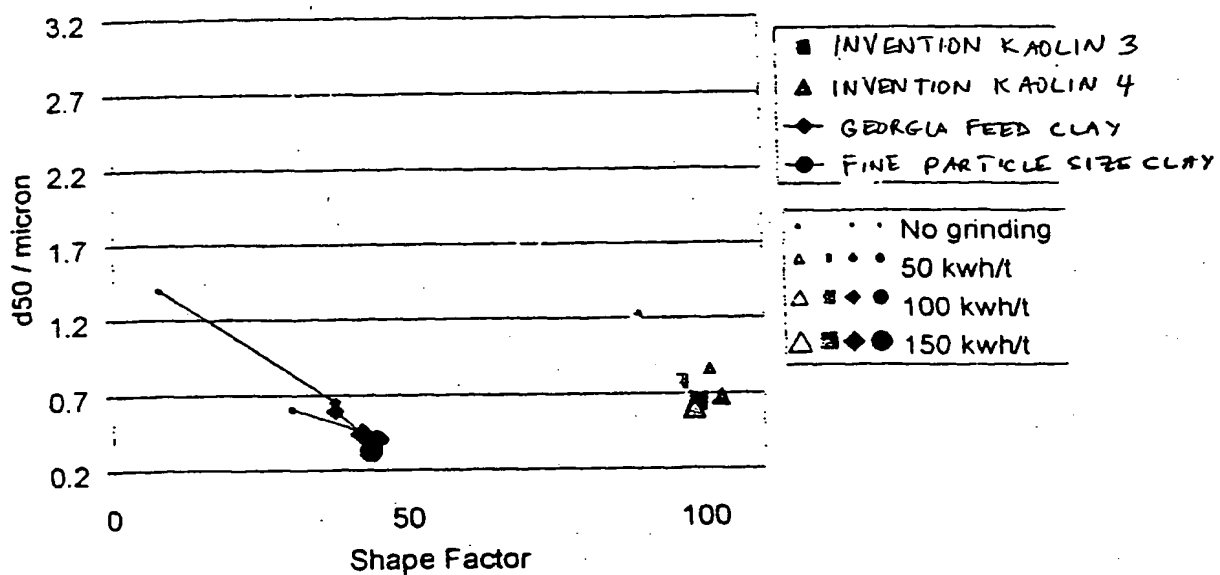


FIGURE 7

**FIGURE 8**

(19) World Intellectual Property Organization
International Bureau

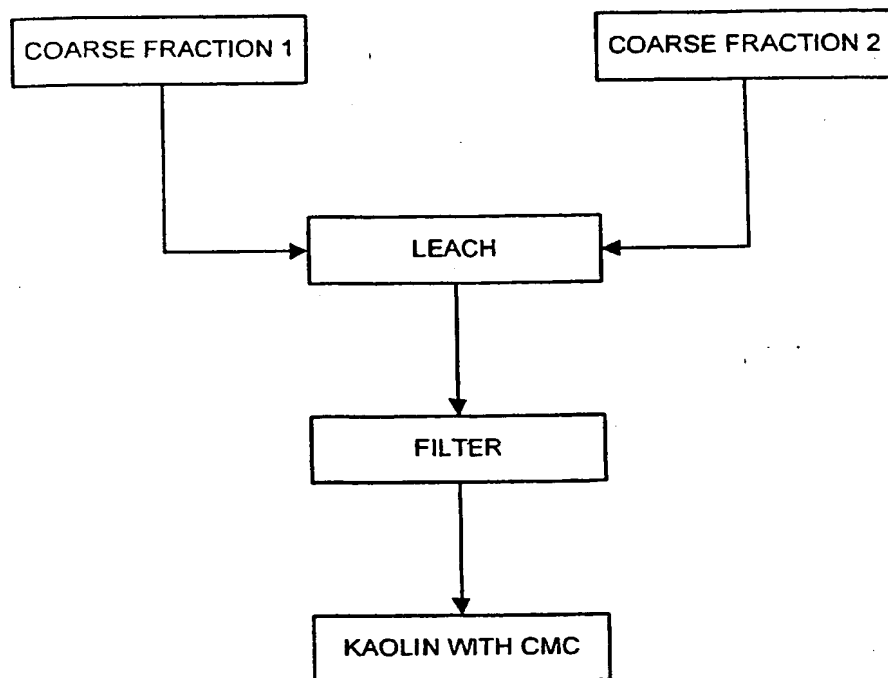

(43) International Publication Date
20 March 2003 (20.03.2003)

PCT

(10) International Publication Number
WO 03/022933 A3

(51) International Patent Classification⁷: C09C 1/42, 1/00,
D21H 19/40, C08K 3/34 // D21H 21/52

(21) International Application Number: PCT/US02/28305

(22) International Filing Date:
6 September 2002 (06.09.2002)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/318,207 7 September 2001 (07.09.2001) US

(71) Applicant: IMERYS PIGMENTS, INC. [US/US]; 100
Mansell Court, Suite 300, Roswell, GA 30076 (US).

(72) Inventors: JONES, Philip, J., E.; 1045 Creek Ridge
Pointe, Alpharetta, GA 30005 (US). PRUETT, Robert,


J.; 113 Cambridge Drive N., Milledgeville, GA 31061
(US). GARSKA, Michael, J.; 271 South Anderson Drive,
Sandersville, GA 31082 (US). BILIMORIA, Bomi,
M.; 113 Carriage Lakes Court, Macon, GA 31210 (US).
YUAN, Jun; 119 Springfield Lane, Warner Robins, GA
31088 (US). CUMMINGS, David, O.; 3204 Hamburg
Road, Warthen, GA 31904 (US). WESLEY, Robin; John
Keay House, St. Austell, Cornwall PL25 4DJ (GB).

(74) Agent: GARRETT, Arthur, S.; Finnegan, Henderson,
Farabow, Garrett & Dunner, L.L.P., 1300 I Street, N.W.,
Washington, DC 20005-3315 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG,
SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC,
VN, YU, ZA, ZM, ZW.

[Continued on next page]

(54) Title: HYPERPLATY CLAYS AND THEIR USE IN PAPER COATING AND FILLING, METHODS FOR MAKING SAME,
AND PAPER PRODUCTS HAVING IMPROVED BRIGHTNESS

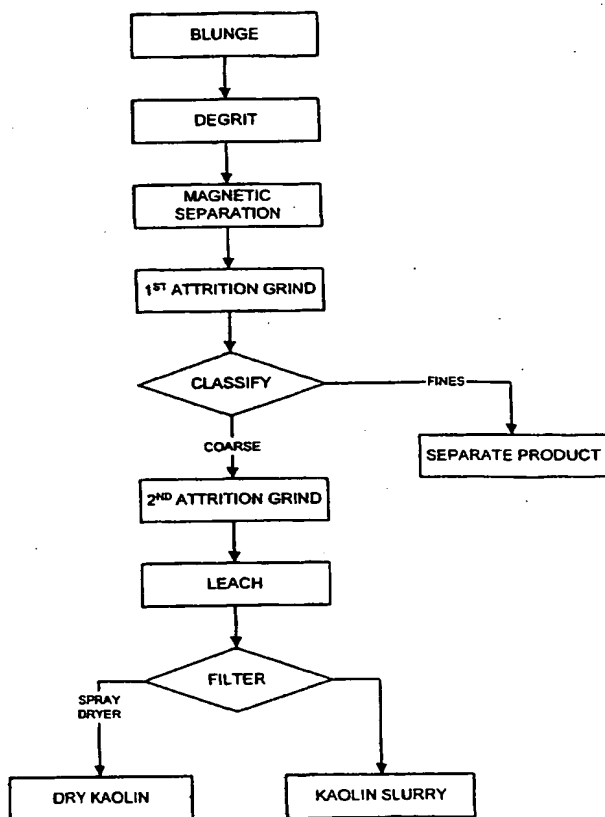

(57) Abstract: The present invention relates to a hydrous kaolin product having improved optical properties, for example, when used in the production of paper products. The present invention comprises an improved barrier coating for paper and a method of making the coated paper. The present invention also comprises an improved method from making filled and coated paper products. The present invention uses a composition comprising kaolin having a shape factor of at least about 70:1, such as at least about 80:1 or at least about 100:1.

WO 03/022933 A3



(84) **Designated States (regional):** ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(88) **Date of publication of the international search report:**
21 August 2003

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— with international search report

INTERNATIONAL SEARCH REPORT

Inter Application No
PC 02/28305

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 C09C1/42 C09C1/00 D21H19/40 C08K3/34 //D21H21/52

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 C09C D21H C08K

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)
EPO-Internal, PAJ, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
P,X	WO 02 16509 A (IMERYS MINERALS LTD ;LORUSSO MARIELLE (GB)) 28 February 2002 (2002-02-28) page 1, line 3 - line 8 page 2, line 30 - page 3, line 10 page 4, line 16 - line 23 examples 1,2	1-25
X	EP 0 524 635 A (MITSUBISHI PAPER MILLS LTD) 27 January 1993 (1993-01-27) page 4, line 10 - line 35 page 6, line 31 - line 43 claims 1-5	1-25
X	US 4 889 886 A (WADA MITSUO ET AL) 26 December 1989 (1989-12-26) column 6, line 3 - line 27 column 9, line 33 - line 40; claims	1-25

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

17 December 2002

Date of mailing of the international search report

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Nobis, B

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 02/28305

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 925 454 A (BEKELE SOLOMON) 20 July 1999 (1999-07-20) column 2, line 29 - line 39 column 3, line 33 - line 37 ---	1-25
A	WO 99 51815 A (HUSBAND JOHN CLAUDE ;ECC INT LTD (GB); PAYTON DESMOND CHARLES (GB)) 14 October 1999 (1999-10-14) page 9, line 1 -page 10, line 14 page 15, line 17 - line 24 page 16, line 5 - line 18 page 20, line 22 - line 27 example 3 ---	1-25
A	WO 00 59841 A (IMERYS PIGMENTS INC ;PRUETT ROBERT J (US); YUAN JUN (US); BROWN HA) 12 October 2000 (2000-10-12) page 1, paragraph 1 page 8, paragraph 3 -page 9, paragraph 1 page 13, paragraph 3 page 24, paragraph 3 -page 25, paragraph 3 page 28, paragraph 3 page 34, paragraph 1 -----	1-25

INTERNATIONAL SEARCH REPORT

tional application No.
PCT/US 02/28305

Box I Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)

This International Search Report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:

2. ☐ Claims Nos.:
because they relate to parts of the International Application that do not comply with the prescribed requirements to such an extent that no meaningful International Search can be carried out, specifically:

3. ☐ Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box II Observations where unity of invention is lacking (Continuation of item 2 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

see additional sheet

1. ☐ As all required additional search fees were timely paid by the applicant, this International Search Report covers all searchable claims.

2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.

3. ☐ As only some of the required additional search fees were timely paid by the applicant, this International Search Report covers only those claims for which fees were paid, specifically claims Nos.:

4. ☒ No required additional search fees were timely paid by the applicant. Consequently, this International Search Report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

1-25

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.
- ☐ No protest accompanied the payment of additional search fees.

FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

This International Searching Authority found multiple (groups of) inventions in this international application, as follows:

1. Claims: 1-25

kaolin having a shape factor of at least about 70:1,
compositions comprising said kaolin and methods making use
of said kaolin

2. Claims: 26-32,53-56

improving barrier properties in paper by coating with a
kaolin having a shape factor of at least about 70:1

3. Claims: 33-52

refining kaolin to provide a kaolin having a shape factor of
at least about 70:1

4. Claims: 57-64

stabilizing a slurry of a kaolin having a shape factor of at
least about 70:1

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No.

PCT/US 02/28305

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 0216509	A	28-02-2002	AU 8228801 A WO 0216509 A1	04-03-2002 28-02-2002
EP 0524635	A	27-01-1993	JP 3213630 B2 JP 5221115 A DE 69201413 D1 DE 69201413 T2 EP 0524635 A1 FR 2691989 A1 US 5302437 A	02-10-2001 31-08-1993 23-03-1995 27-07-1995 27-01-1993 10-12-1993 12-04-1994
US 4889886	A	26-12-1989	JP 7039533 B JP 63146959 A DE 3786899 D1 DE 3786899 T2 EP 0271326 A2 KR 9204787 B1	01-05-1995 18-06-1988 09-09-1993 11-11-1993 15-06-1988 15-06-1992
US 5925454	A	20-07-1999	AT 234338 T AU 724553 B2 AU 6489596 A BR 9609719 A CA 2226865 A1 EP 0869989 A1 JP 11509254 T NZ 312951 A WO 9703113 A1	15-03-2003 28-09-2000 10-02-1997 23-02-1999 30-01-1997 14-10-1998 17-08-1999 29-11-1999 30-01-1997
WO 9951815	A	14-10-1999	AU 747334 B2 AU 3156299 A BR 9909407 A EP 1084296 A1 WO 9951815 A1	16-05-2002 25-10-1999 12-12-2000 21-03-2001 14-10-1999
WO 0059841	A	12-10-2000	AU 4183500 A BR 0009522 A DE 10084441 T0 WO 0059841 A1	23-10-2000 15-01-2002 21-03-2002 12-10-2000

THIS PAGE BLANK (USPTO)

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☒ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.

THIS PAGE BLANK (USPTO)